



## VCSUB

### Applications


- ④ Touring performance
- ④ Stadium
- ④ Theatre

### Feature

- ④ Large size 135mm voice coil, low frequency down to 25Hz
- ④ Use three point hanging method (Cardioid directivity, can be stacked at four points)
- ④ Neodymium high-sensitivity driver, maximum headroom
- ④ The net surface has NL4 plug, which is convenient for cardioid subwoofer wiring

### Technical specification


- ④ FREQUENCY RESPONSE 30 Hz ~ 150 Hz (± 3 dB) 25 Hz ~ 200 Hz (-10 dB)
- ④ NOMINAL COVERAGE (-6dB) Non-directional
- ④ SENSITIVITY(@1w/1m) 97dB SPL
- ④ POWER RATING (AES) 1800W
- ④ NOMINAL IMPEDANCE 8 ohm
- ④ MAXIMUM SPL 129/135 dB SPL peak
- ④ Drivers 1×21" (135mm Voice coil neodymium) woofer

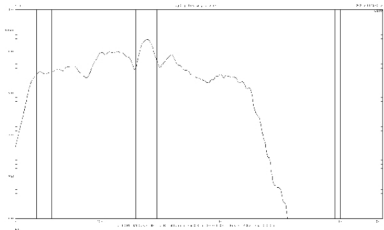


Frequency response

### Physical data


- ④ DIMENSIONS(HxWxD) 590 x 1000 x 674 mm
- ④ WEIGHT 84 kg
- ④ CONNECTORS 2x4 WP4, 2x4 NL4
- ④ SPEAKER CABLES WP4:1-2+... NL4:1+1-...
- ④ MATERIALS 18mm,24mm birch multi-plywood
- ④ FINISH Black polyurea paintings
- ④ GRILLE Black epoxy mesh grille with acoustically reticulated cloth
- ④ RIGGING three point hanging method (Cardioid directivity, can be stacked at four points)

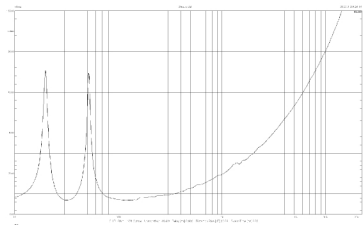


Impedance



Front



Top



Side