

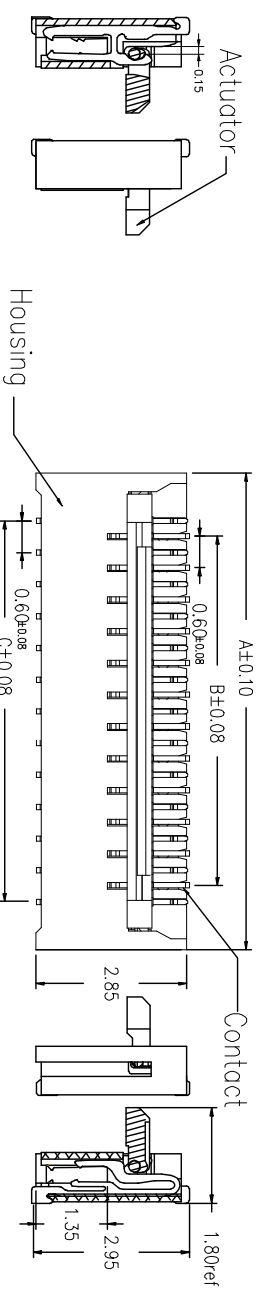


FPC/FCC Insert Direction

Recommended P.C.B Layout

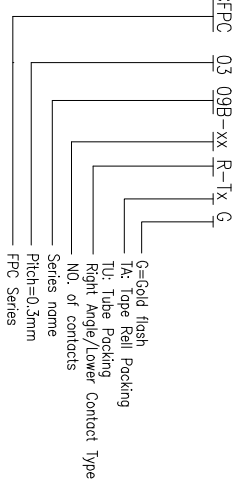

- Note:
- Material
 - Housing: LCP UL94-V0 Color:Natural,Or Black
 - Actuator: LCP UL94-V0 Color:Black Or Natural
 - Contact: Phosphor Bronze.
 - Plating
 - Contact: See Part Number.
 - Rating:
 - Operating Voltage: 30V AC/DC.
 - Current Rating: 0.2A AC/DC.
 - Operating Temperature: -55°C~+85°C.
 - Part Number:

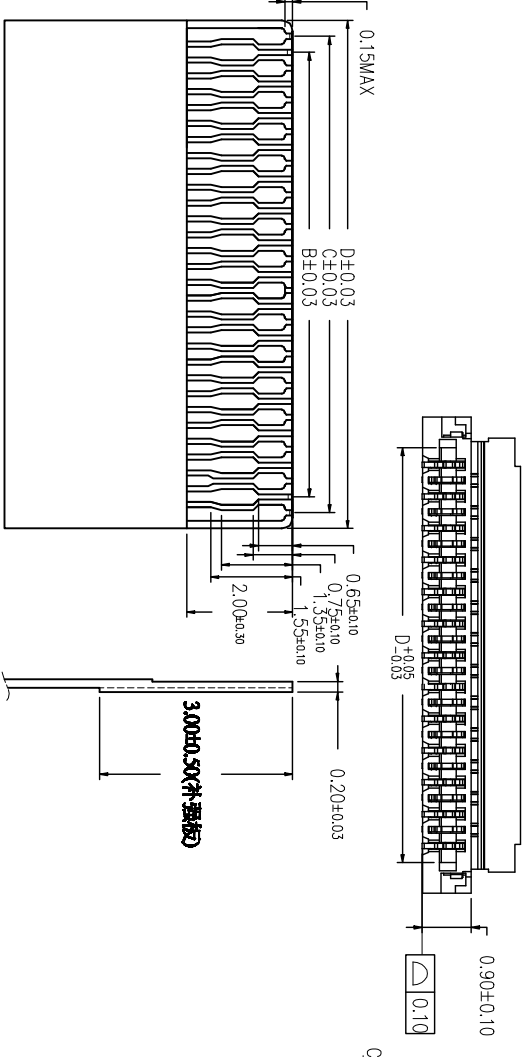

No. of Contacts	Dimension			
	A	B	C	D
7	3.60	1.20	1.80	2.43
9	4.20	1.80	2.40	3.03
11	4.80	2.40	3.00	3.63
13	5.40	3.00	3.60	4.23
15	6.00	3.60	4.20	4.83
21	7.80	5.40	6.00	6.63
23	8.40	6.00	6.60	7.23
25	9.00	6.60	7.20	7.83
27	9.60	7.20	7.80	8.43
31	10.80	8.40	9.00	9.63
39	13.20	10.80	11.40	12.03
51	16.80	13.40	15.00	15.63
61	19.80	17.40	18.00	18.63

Applicable FPC

本产品符合 RoHS 符合 SONY00259 符合 Hf 符合 其他
 禁止使用本公司所禁用有害物质

REV	DESCRIPTION	ECN.NO	BY	DATE
A	NEW DRAWING			
REV	DESCRIPTION	ECN.NO	BY	DATE

UNLESS OTHERWISE SPECIFIED
 -TOLERANCES-
 公差参考表

APPD: 核准: 检查: 日期: Yang
 DWG NO: FPC0309B-xxR-TAGX
 产品名称: 后盖板式
 DATE SCALE UNIT PAGE
 20111102 1:1 mm 1/1

深圳扬讯电子有限公司

X.X	:±0.30	X.X'	:±5'
X.XX	:±0.20	X.XX'	:±2'
X.XXX	:±0.02	X.XXX'	:±1'

Dimension	Unit
A	mm
B	mm
C	mm
D	mm