




## HOW TO ORDER

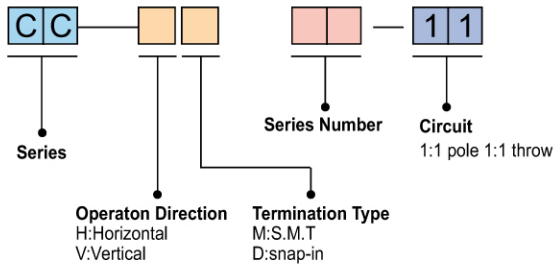

### ◆ Features

- Miniature size for saving space
- Micro-current
- Side push or Top push
- Reflow solderable

### ◆ Applications

- Audio
- VCR
- FDD
- DVD

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-10℃ to +60℃
Electrical performance	Rating	0.5 to 10mA 5V DC(Resistive load)
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	100V AC for 1 min.
	Contact resistance	1Ω max.
Durability	Lifetime	100,000 Cycles
Mechanical performance	Operating force	40gf max
	Travel	0.5 ± 0.2mm
Poles and Throws		1-pole 1-throw

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<p>● CC-VM01-11</p> <p>Operating Direction</p> <p>Maximum range: 6.4±0.2</p> <p>ON starting position</p> <p>Dimensions: 10.05, 1.95, 2.85, 4.5, 7, 7.8, 4.95, 1, 0.25, 0.5</p>	<p>Circuit Diagram: 1 pole 1 throw</p> <p>PCB Layout: 6.2, 1.2, 1.5, 4.95, φ1.2</p>

DETECTOR SWITCH