





# SMT SERIES

## 1.6mm Half Pitch SMT Type

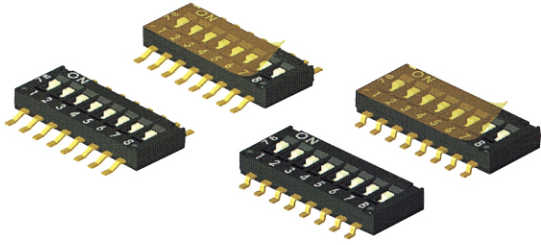

### HOW TO ORDER

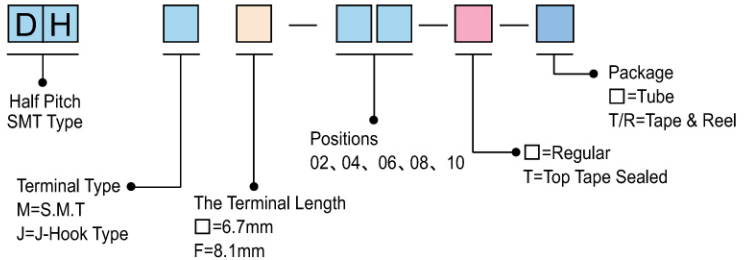

Precaution: For quality assurance, please operate actuators carefully refer specification.

### ◆ Features

- Low profile of 1.6mm height
- Gold contact for high reliability
- Sealed top tape type available for washing

### ◆ SPECIFICATION

Items		Standard
Environmental	Operation Temperature Range	-40°C to +85°C
	Storage Temperature Range	-40°C to +85°C
Electrical performance	Electrical Life	1000 operation cycles
	Non-Switching Rating	100mA, 50VDC
	Switching Rating	25mA, 24VDC
Mechanical performance	Operating force	500gf
	Stroke	0.6mm

### Package

DHM(F)-02(-T):125pcs/tube  
 DHM(F)-04(-T):75pcs/tube  
 DHM(F)-06(-T):54pcs/tube  
 DHM(F)-08(-T):40pcs/tube  
 DHM(F)-10(-T):33pcs/tube  
 Tape and Reel:  
 DHM(F) series:2500 pcs/reel

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram Pad Layout																					
1	<p>● DHMF</p>	<table border="1"> <thead> <tr> <th>Model</th> <th>Positions</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>DHMF-10</td> <td>10</td> <td>13.93[.548]</td> </tr> <tr> <td>DHMF-08</td> <td>08</td> <td>11.39[.448]</td> </tr> <tr> <td>DHMF-06</td> <td>06</td> <td>8.85[.348]</td> </tr> <tr> <td>DHMF-04</td> <td>04</td> <td>6.31[.248]</td> </tr> <tr> <td>DHMF-02</td> <td>02</td> <td>3.77[.148]</td> </tr> <tr> <th>PROD.NO.</th> <th>NO.OF.POS.</th> <th>DM.A</th> </tr> </tbody> </table> <p>P.C.B Layout</p>	Model	Positions	Length	DHMF-10	10	13.93[.548]	DHMF-08	08	11.39[.448]	DHMF-06	06	8.85[.348]	DHMF-04	04	6.31[.248]	DHMF-02	02	3.77[.148]	PROD.NO.	NO.OF.POS.	DM.A
Model	Positions	Length																					
DHMF-10	10	13.93[.548]																					
DHMF-08	08	11.39[.448]																					
DHMF-06	06	8.85[.348]																					
DHMF-04	04	6.31[.248]																					
DHMF-02	02	3.77[.148]																					
PROD.NO.	NO.OF.POS.	DM.A																					
2	<p>● DHM</p>	<table border="1"> <thead> <tr> <th>Model</th> <th>Positions</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>DHM-10</td> <td>10</td> <td>13.93[.548]</td> </tr> <tr> <td>DHM-08</td> <td>08</td> <td>11.39[.448]</td> </tr> <tr> <td>DHM-06</td> <td>06</td> <td>8.85[.348]</td> </tr> <tr> <td>DHM-04</td> <td>04</td> <td>6.31[.248]</td> </tr> <tr> <td>DHM-02</td> <td>02</td> <td>3.77[.148]</td> </tr> <tr> <th>PROD.NO.</th> <th>NO.OF.POS.</th> <th>DM.A</th> </tr> </tbody> </table> <p>P.C.B Layout</p>	Model	Positions	Length	DHM-10	10	13.93[.548]	DHM-08	08	11.39[.448]	DHM-06	06	8.85[.348]	DHM-04	04	6.31[.248]	DHM-02	02	3.77[.148]	PROD.NO.	NO.OF.POS.	DM.A
Model	Positions	Length																					
DHM-10	10	13.93[.548]																					
DHM-08	08	11.39[.448]																					
DHM-06	06	8.85[.348]																					
DHM-04	04	6.31[.248]																					
DHM-02	02	3.77[.148]																					
PROD.NO.	NO.OF.POS.	DM.A																					

DIP SERIES