


## HOW TO ORDER

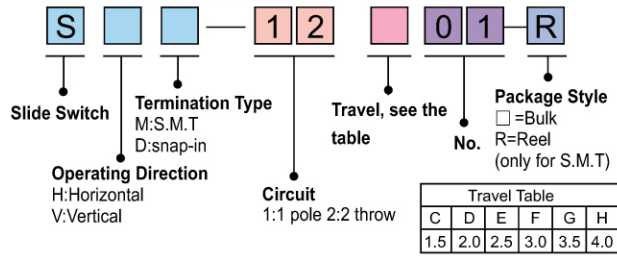

### ◆ Features

- Through hole & SMT type
- Low profile of 1.5mm height
- 1P2T or 2P2T type
- Reflow solderable
- RoHS compliant

### ◆ Applications

- Telecommunication products
- Computer peripherals
- Thermostat select switch
- Instrumentations

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-10℃ to +70℃
Electrical performance	Rating	300mA, 4V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	70mΩ max.
Durability	Lifetime	10,000 Cycles min
Mechanical performance	Operating force	2C-2P:180 ± 50gf
	Travel	1.5 ± 0.2mm

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	● SVM-22C03 	
2	● SVD-12C02 	