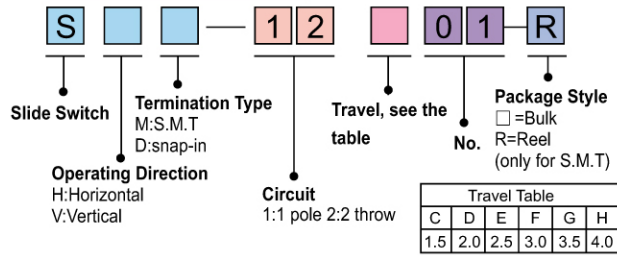
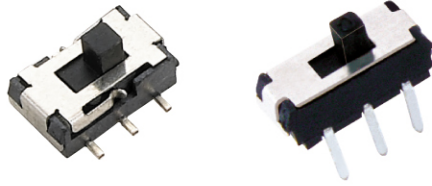


HOW TO ORDER



◆ Features

- Through hole & SMT type
- 1.5mm travel distance
- 2P2T & on-on type
- Reflow solderable
- RoHS compliant

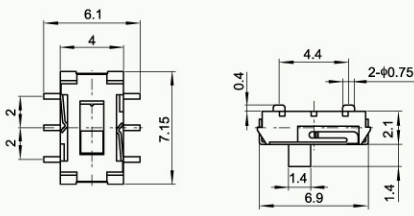

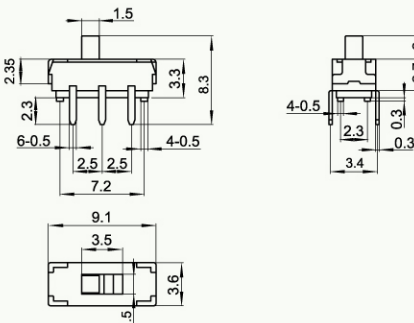

◆ Applications

- Telecommunication products
- Computer peripherals
- Thermostat select switch
- Instrumentations

◆ SPECIFICATION

Items		Standard
Operating temperature range		-10°C to +70°C
Electrical performance	Rating	300mA, 4V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	70mΩ max.
Durability	Lifetime	10,000 Cycles min
Mechanical performance	Operating force	120 ± 50gf 2C-2P: 200 ± 50gf
	Travel	1.5 ± 0.2mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<ul style="list-style-type: none"> ● SVM-22C02 	
2	<ul style="list-style-type: none"> ● SVD-22C01 	

SLIDE SERIES