


HOW TO ORDER

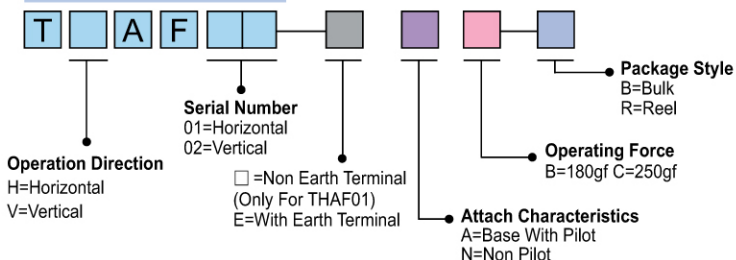

◆ FEATURES

- Miniature size 3.5x3mm
- Horizontal and Vertical push type
- Reflow solderable
- Flat terminal

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	01:B=100,000Cycles C=50,000Cycles 02:B=500,000Cycles C=50,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.15 ± 0.1mm

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<p>● THAF01-E</p>	
2	<p>● THAF01</p>	
3	<p>● TVAF02</p>	