





# A SERIES

## 3.5x4.7 Horizontal Push Tact Switch

TACT SWITCH

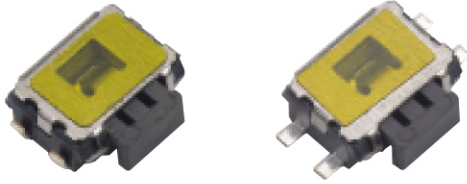

### HOW TO ORDER

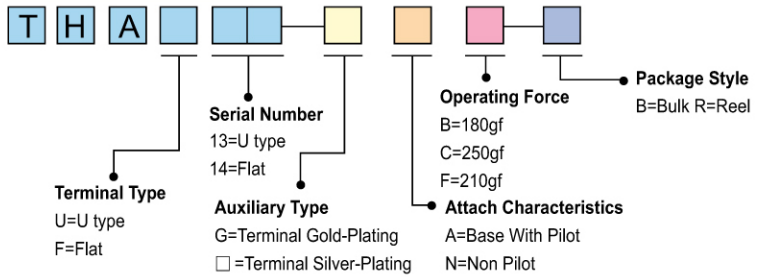

### ◆ FEATURES

- Compact size 3.5x4.7mm for high density mounting
- Horizontal Push type
- Reflow solderable
- Miniature type

### ◆ APPLICATIONS

- Remote keyless entry
- Navigation/audio systems
- HVAC Overhead consoles
- Steering
- Shifters

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=100,000Cycles C=50,000Cycles F=50,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf F:210gf
	Travel	0.30 ± 0.1mm

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<p>● THAU13</p>	
2	<p>● THAF14</p>	