




B SERIES

2.5x7.0 SMT & Right Angle Tact Switch



HOW TO ORDER

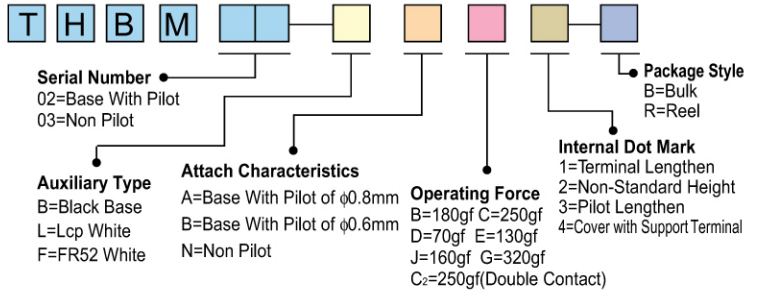

◆ FEATURES

- Miniature size 7x2.5mm
- Horizontal push type
- Reflow solderable
- Fixed pillar available
- Longer cover available

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100M Ω min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100m Ω max.
Durability	Lifetime	D:E:B:J=100,000Cycles C:G=50,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf D:70gf E:130gf J:160gf G:320gf
	Travel	0.25 \pm 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<p>● THBM02</p>	
2	<p>● THBM02-□□□4</p>	
3	<p>● THBM03</p>	

TACT SWITCH