



D SERIES

6.0x6.0 Other Terminal Shape Tact Switch

TACT SWITCH

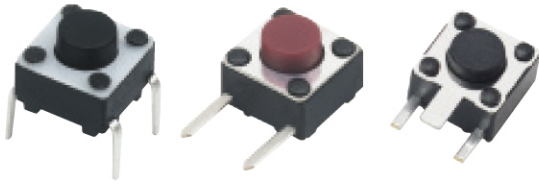

HOW TO ORDER

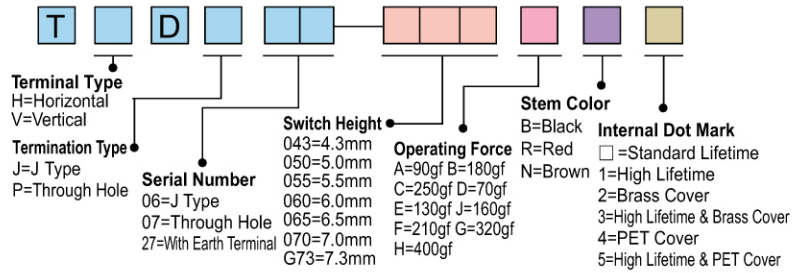

◆ FEATURES

- Compact size 6x6mm
- Snap-in type
- Vertical push type
- Partial output terminal can be used as jumper pin
- Other terminal shape

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-40°C to +90°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A:B:D:E:J=1,000,000Cycles C:G=500,000Cycles H=300,000Cycles
Mechanical performance	Operating force	A:90gf D:70gf B:180gf E:130gf C:250gf J:160gf G:320gf H:400gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram														
		PCB Layout														
1	<p>● TVDJ06</p> <table border="1"> <thead> <tr> <th>H</th> <th>A</th> </tr> </thead> <tbody> <tr><td>4.3</td><td>φ3.5</td></tr> <tr><td>5.0</td><td>φ3.4</td></tr> <tr><td>5.5</td><td>φ3.4</td></tr> <tr><td>6.0</td><td>φ3.3</td></tr> <tr><td>6.5</td><td>φ3.3</td></tr> <tr><td>7.0</td><td>φ3.3</td></tr> </tbody> </table>	H	A	4.3	φ3.5	5.0	φ3.4	5.5	φ3.4	6.0	φ3.3	6.5	φ3.3	7.0	φ3.3	
H	A															
4.3	φ3.5															
5.0	φ3.4															
5.5	φ3.4															
6.0	φ3.3															
6.5	φ3.3															
7.0	φ3.3															
2	<p>● THDP07</p> <table border="1"> <thead> <tr> <th>H</th> <th>A</th> </tr> </thead> <tbody> <tr><td>4.3</td><td>φ3.5</td></tr> <tr><td>5.0</td><td>φ3.4</td></tr> <tr><td>5.5</td><td>φ3.4</td></tr> <tr><td>6.0</td><td>φ3.3</td></tr> <tr><td>6.5</td><td>φ3.3</td></tr> <tr><td>7.0</td><td>φ3.3</td></tr> </tbody> </table>	H	A	4.3	φ3.5	5.0	φ3.4	5.5	φ3.4	6.0	φ3.3	6.5	φ3.3	7.0	φ3.3	
H	A															
4.3	φ3.5															
5.0	φ3.4															
5.5	φ3.4															
6.0	φ3.3															
6.5	φ3.3															
7.0	φ3.3															
3	<p>● THDP27</p> <table border="1"> <thead> <tr> <th>H</th> <th>A</th> </tr> </thead> <tbody> <tr><td>4.3</td><td>φ3.5</td></tr> <tr><td>5.0</td><td>φ3.4</td></tr> <tr><td>5.5</td><td>φ3.4</td></tr> <tr><td>6.0</td><td>φ3.3</td></tr> <tr><td>6.5</td><td>φ3.3</td></tr> <tr><td>7.0</td><td>φ3.3</td></tr> </tbody> </table>	H	A	4.3	φ3.5	5.0	φ3.4	5.5	φ3.4	6.0	φ3.3	6.5	φ3.3	7.0	φ3.3	
H	A															
4.3	φ3.5															
5.0	φ3.4															
5.5	φ3.4															
6.0	φ3.3															
6.5	φ3.3															
7.0	φ3.3															