


D SERIES

6.0x6.0 Other Bracket Shape Type Tact Switch

TACT SWITCH



HOW TO ORDER

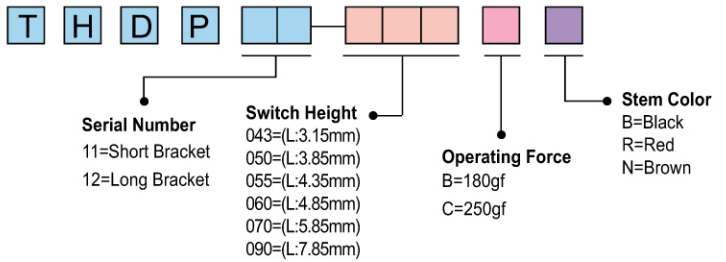

◆ FEATURES

- 6x6mm, Snap-in type
- Ground pin available
- Reflow solderable
- Partial output terminal can be used as jumper pin

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-40°C to +90°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=500,000Cycles C=300,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram												
		PCB Layout												
1	<p>● THDP11</p> <table border="1"> <thead> <tr> <th>L</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>3.15</td> <td>3.5</td> </tr> <tr> <td>3.85</td> <td>3.5</td> </tr> <tr> <td>5.85</td> <td>3.3</td> </tr> <tr> <td>8.35</td> <td>3</td> </tr> <tr> <td>15.85</td> <td>3</td> </tr> </tbody> </table>	L	A	3.15	3.5	3.85	3.5	5.85	3.3	8.35	3	15.85	3	
L	A													
3.15	3.5													
3.85	3.5													
5.85	3.3													
8.35	3													
15.85	3													
2	<p>● THDP12</p> <table border="1"> <thead> <tr> <th>L</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>3.15</td> <td>3.5</td> </tr> <tr> <td>3.85</td> <td>3.5</td> </tr> <tr> <td>5.85</td> <td>3.3</td> </tr> <tr> <td>8.35</td> <td>3</td> </tr> <tr> <td>15.85</td> <td>3</td> </tr> </tbody> </table>	L	A	3.15	3.5	3.85	3.5	5.85	3.3	8.35	3	15.85	3	
L	A													
3.15	3.5													
3.85	3.5													
5.85	3.3													
8.35	3													
15.85	3													