




# MULTI FUNCTION SERIES

## Lever and Push Operation Type Switch Tact Switch

MULTI FUNCTION



### HOW TO ORDER

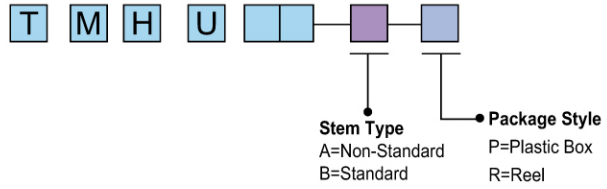

### ◆ FEATURES

- Lever and center-push type
- Realize compound action by a single lever
- Momentary type
- Reflow solderable

### ◆ APPLICATIONS

- Remote control
- Volume control
- Portable device
- Digital Camera

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	10mA. 5V DC
	Insulation resistance	1V max. at 1mA 5V DC
	Dielectric strength	100mΩ max.
	Contact resistance	100,000Cycles
Durability	Lifetime	Lever portion 70 ± 40gf Push portion 200 ± 100gf
Mechanical performance	Operating force	4-direction -25° -0° - +25°

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram PCB Layout
1	<p>● TMHU26</p>	
2	<p>● TMHU27</p>	