




A SERIES

3.5x4.7 Vertical Push Tact Switch

TACT SWITCH



HOW TO ORDER

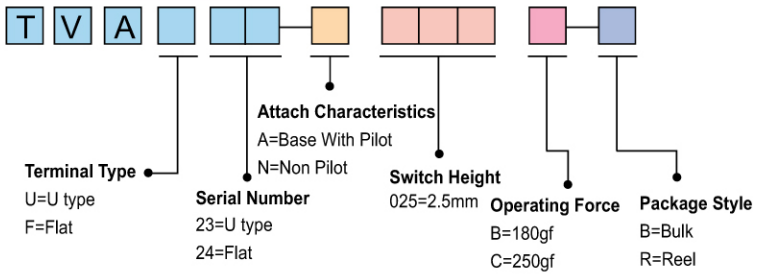

◆ FEATURES

- Surface mount gull-wing terminal
- Reflow solderable
- Multiple operating force and button height
- Excellent tactile feedback

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=300,000Cycles C=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram PCB Layout
		<div data-bbox="239 1336 367 1379">● TVAU23</div>
<div data-bbox="239 1681 367 1724">● TVAF24</div>		