




# B SERIES

## 3.7x6.3 SMT & Soft Feeling Switch

TACT SWITCH



### HOW TO ORDER

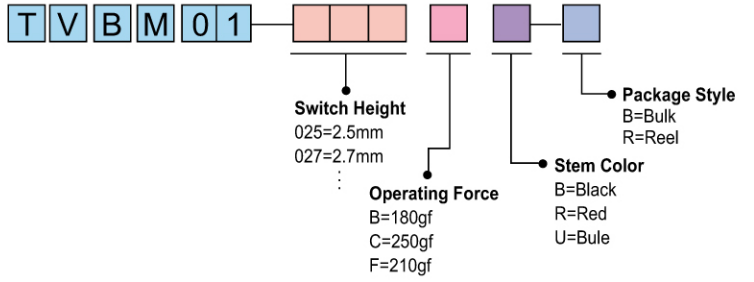

### ◆ FEATURES

- Compact size 3.7x6.3mm
- Low profile of 2.5mm height
- Contacts sealed structure
- Reflow solderable
- Rubber button with Soft feeling

### ◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=300,000Cycles C:F=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf F:210gf
	Travel	0.30 ± 0.2mm

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<ul style="list-style-type: none"> <li>● TVBM01</li> </ul>	