




B SERIES

3.5x6.0 Vertical Push Tact Switch

TACT SWITCH



HOW TO ORDER

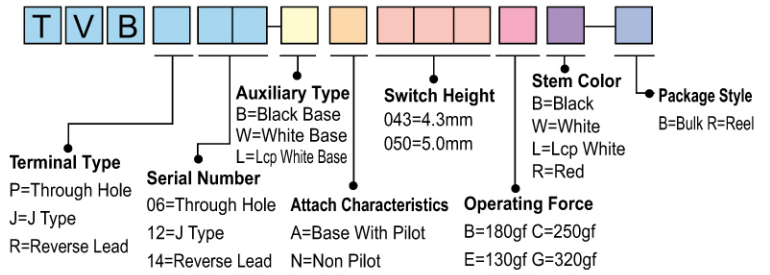

◆ FEATURES

- 6x3.5mm for high density mounting
- Snap-in type
- Vertical push type

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-20°C to +70°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:D:E=100,000Cycles C=50,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf D:70gf E:130gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram			
		PCB Layout			
1	<p>● TVBP06</p> <table border="1"> <tr><td>H</td></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> </table>	H	4.3	5.0	
H					
4.3					
5.0					
2	<p>● TVBJ12</p> <table border="1"> <tr><td>H</td></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> </table>	H	4.3	5.0	
H					
4.3					
5.0					
3	<p>● TVBR14</p> <table border="1"> <tr><td>H</td></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> </table>	H	4.3	5.0	
H					
4.3					
5.0					