





C SERIES

4.3x4.5 SMT Type Tact Switch

TACT SWITCH

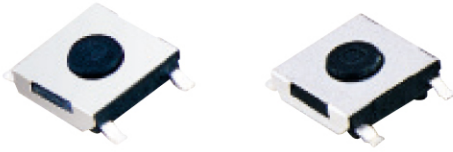

HOW TO ORDER

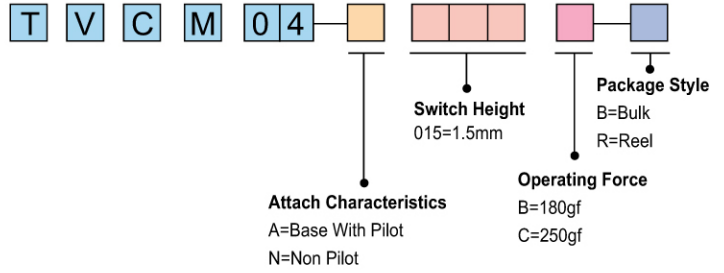

◆ FEATURES

- Surface mounting type
- Compact size 4.3x4.5mm for high density mounting
- Contacts sealed structure
- Reflow solderable
- Low profile of 1.6mm height

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B:C=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.2 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	<ul style="list-style-type: none"> ● TVCM04-A 	
2	<ul style="list-style-type: none"> ● TVCM04-N 	