




E SERIES

6.2x6.2 Flat & U-Type Terminals Type Tact Switch

TACT SWITCH



HOW TO ORDER

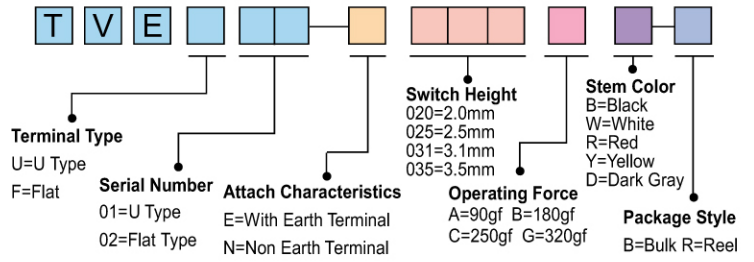

◆ Features

- Compact size 6x6mm for high density mounting
- Vertical Push type
- Reflow solderable
- Ground pin available

◆ Applications

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A:B=1,000,000Cycles C=500,000Cycles G=300,000Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf G:320gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram PCB Layout	
1	<p>● TVEU01</p>		
2	<p>● TVEF02</p>		