





G SERIES

12.0x12.0 Flat Stem With Stable Operation Feeling Tact Switch

TACT SWITCH

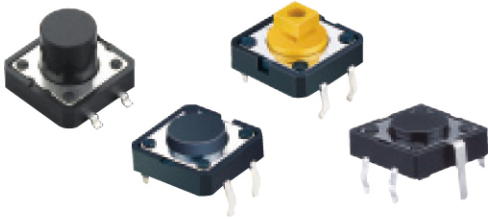

HOW TO ORDER

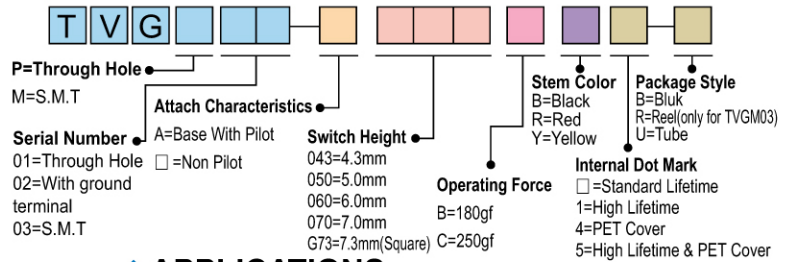

◆ FEATURES

- High reliable metal contacts
- Dustproof sealed structure
- Long lifetime and high reliable metal contacts
- Reflow solderable
- Partial output terminal can be used as jumper pin
- Cap available
- Ground terminal available

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=200,000Cycles C=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.25 ± 0.1mm

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ DIAGRAM

No.	Dimensions	Circuit Diagram					
		PCB Layout					
1	<p>● TVGM03</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> <tr><td>6.0</td></tr> <tr><td>7.0</td></tr> </table>	H	4.3	5.0	6.0	7.0	
H							
4.3							
5.0							
6.0							
7.0							
2	<p>● TVGP01</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> <tr><td>6.0</td></tr> <tr><td>7.0</td></tr> </table>	H	4.3	5.0	6.0	7.0	
H							
4.3							
5.0							
6.0							
7.0							
3	<p>● TVGP01-□ G73</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> <tr><td>6.0</td></tr> <tr><td>7.0</td></tr> </table>	H	4.3	5.0	6.0	7.0	
H							
4.3							
5.0							
6.0							
7.0							
4	<p>● TVGP02</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.3</td></tr> <tr><td>5.0</td></tr> <tr><td>6.0</td></tr> <tr><td>7.0</td></tr> </table>	H	4.3	5.0	6.0	7.0	
H							
4.3							
5.0							
6.0							
7.0							