




J SERIES

6.0x6.0 Washable Tact Switch

TACT SWITCH



HOW TO ORDER

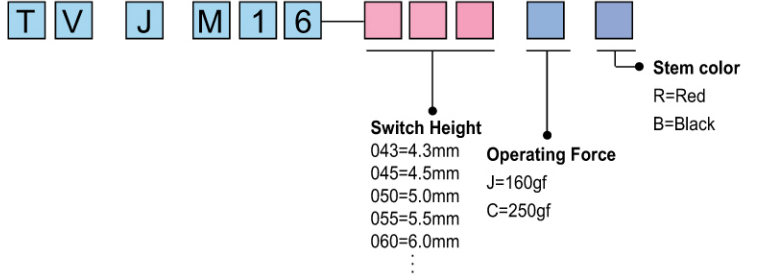

◆ FEATURES

- Waterproof sealed structure
- 6x6mm SMT type
- Partial output terminal can be used as jumper pin

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ SPECIFICATION

Items		Standard
Operating temperature range		-25℃ to +85℃
Electrical performance	Rating	100mA. 30V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	AC500V(50Hz) for 1 min.
	Contact resistance	50mΩ max.
Durability	Lifetime	J:C=100,000Cycles
Mechanical performance	Operating force	J:160gf C:250g
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram						
		PCB Layout						
1	<p>● TVJM16</p> <table border="1"> <tr><th>H</th></tr> <tr><td>4.3</td></tr> <tr><td>4.5</td></tr> <tr><td>5.0</td></tr> <tr><td>5.5</td></tr> <tr><td>6.0</td></tr> </table>	H	4.3	4.5	5.0	5.5	6.0	
H								
4.3								
4.5								
5.0								
5.5								
6.0								