

# SANROCK SR260




Drilling depth: 260m    The hole diameter: 130-305mm  
 Diesel engine: Yuchai 73kw/Cummins 82kw    Swing torque: 4500-5000N.m



## SANROCK SR260 WATER WELL DRILLING RIG

- The chassis of the drilling rig adopts a professional traveling motor with a gearbox, which has a longer service life.
- The gearbox is integrally formed, double motors, stronger power, larger torque, more durable, and low maintenance cost.
- It adopts professional excavator chassis, which is sturdy and durable, bears heavy load, wide chain plate, and has little damage to hard road surface.
- Each hydraulic oil pipe is covered with a thick protective sleeve, which makes the oil pipe have a longer service life.
- Dual systems can be installed:  
 Air power system with air compressor.  
 Mud pump system with mud pump.

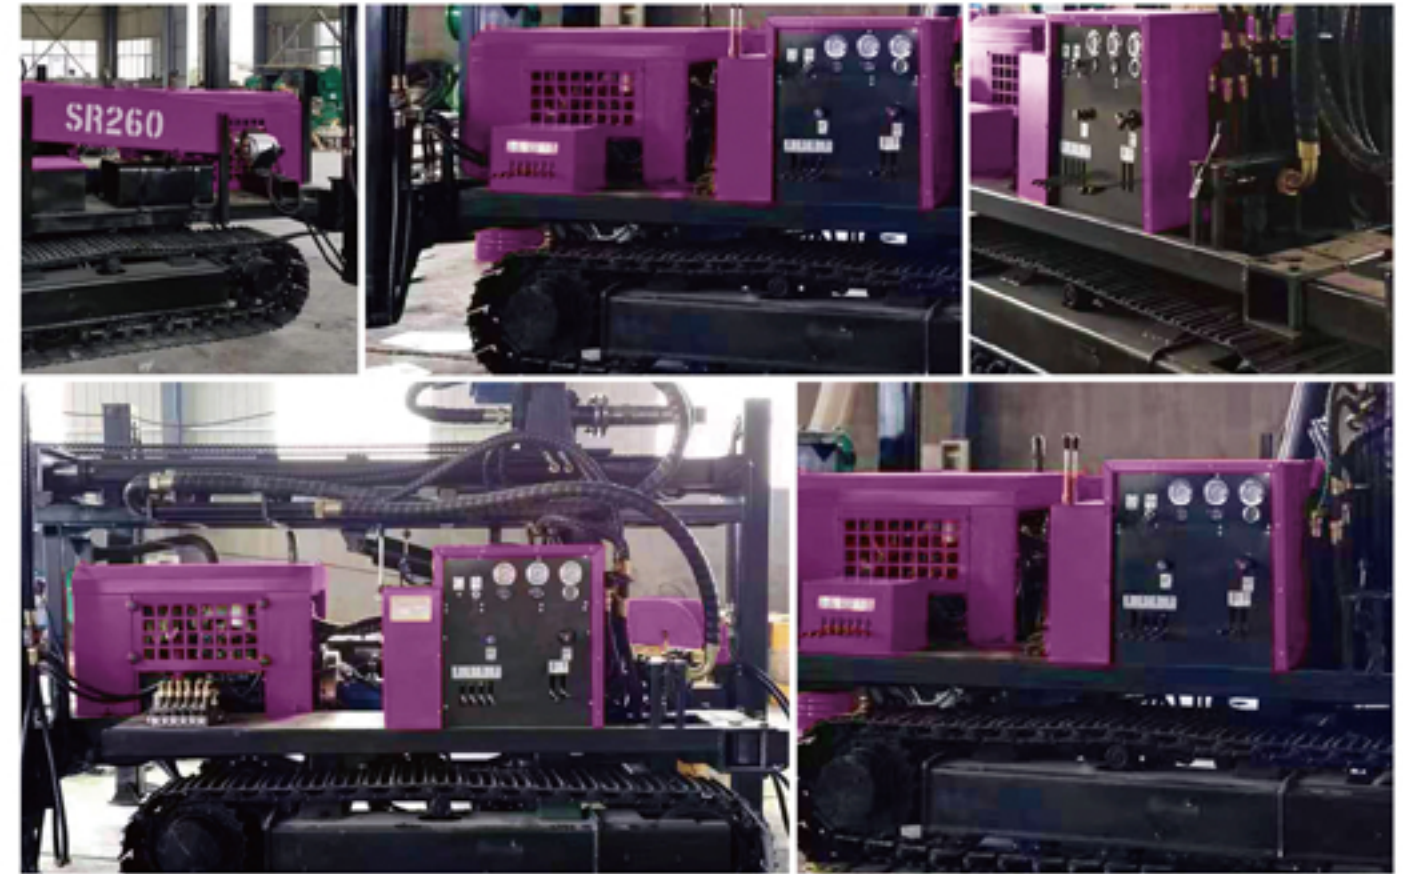

Quzhou Sanrock Heavy Industry Machinery Co.,LTD

Main Technical Specification

Brand Name	Sanrock	Swing Speed	45-65 rpm
Model No.	SR260	Rig Lifting Force	17 T
Drilling Depth	260 m	Using Air Pressure	1.7-3.0 mpa
The Hole Diameter	130-305 mm	Air Consumption	17-30 m <sup>3</sup> /min
Drill Pipe Diameter	Φ76 Φ89	Walking Speed	2.5 km/h
Mast Length	3.6 m	Climbing Angles	Max.30
Diesel Engine	Yuchai 73kw/Cummins 82 kw	Dimension	3900x1850x2350 mm
Swing Torque	4500-5000 N.m	Weight	6000 kg