


Features

- 24 Watts Peak Pulse Power per Line (tp = 8/20μs)
- Bidirectional Configuration
- Protects One Power or I/O Port
- ESD Protection > 40 kilovolts
- Low Clamping Voltages

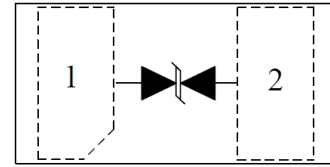

DFN0603

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) :±20kV (air), ±15kV (contact)
- IEC 61000-4-4 (EFT) :40A (5/50ns)
- IEC 61000-4-5(Surge): 3A, 8/20μs


Applications

- Ethernet - 10/100/1000 Base T
- Cellular Phones
- Handheld - Wireless Systems
- Personal Digital Assistant (PDA)
- USB Interface

Electrical Parameters

Parameter	Symbol	Value	Units
Peak pulse power (tp=8/20us)	P _{PP}	24	Watts
Operating Temperature	T _J	-55°C~125°C	°C
Storage Temperature	T _{STG}	-55°C~150°C	°C





Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _F	Forward Current
V _F	Forward Voltage @ I _F

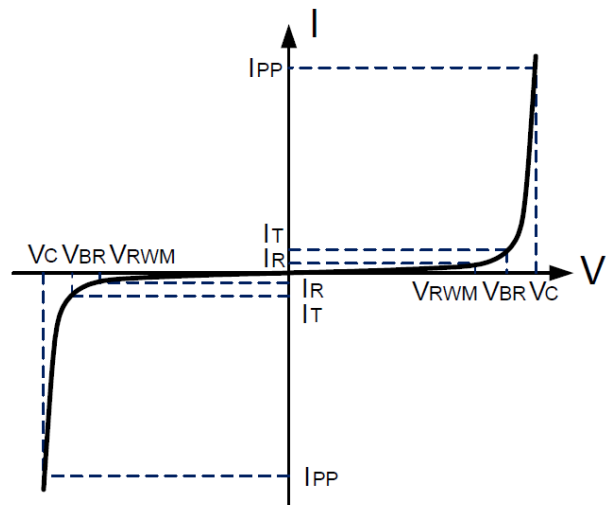


Ratings and characteristic curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Parameter	Symbol	Condition	Min	Max	Units
Reverse Stand-off Voltage	V_{RWM}	Pin2 to 1/Pin1 to 2		3.0	V
Reverse Breakdown Voltage	$V_{BR}(\text{min})$	$I_Z=1\text{mA}$	7.0		V
Reverse Leakage Current	$I_R(\text{max})$	@ V_{RWM}		0.2	μA
Clamping Voltage	V_C	$I_{PP}=3\text{A}$ $t_p=8/20\mu\text{s}$		8	V
Peak Pulse Current	I_{PP}	$t_p=8/20\mu\text{s}$	3		A
Junction Capacitance	$C_{i/o}$	Pin capacitance to GND. $V_{dc}=0\text{V}, f=1\text{MHz}$		0.55	pf

Typical Characteristics

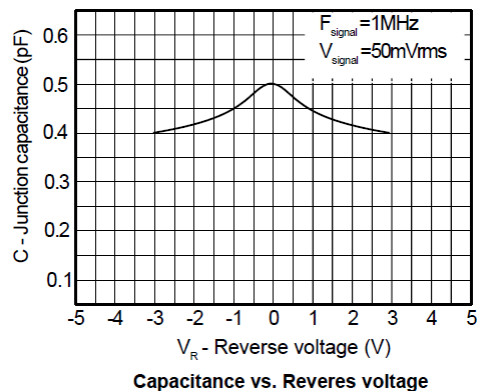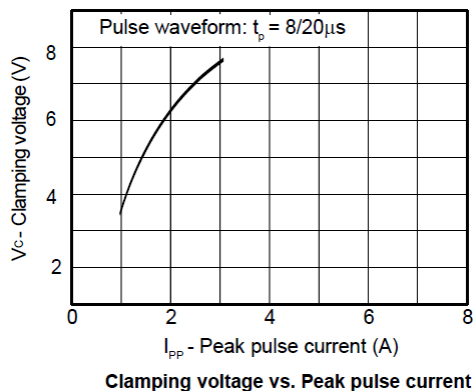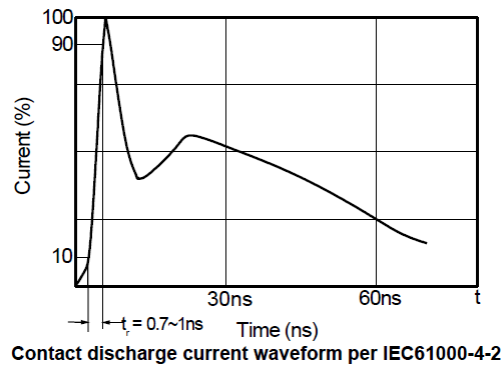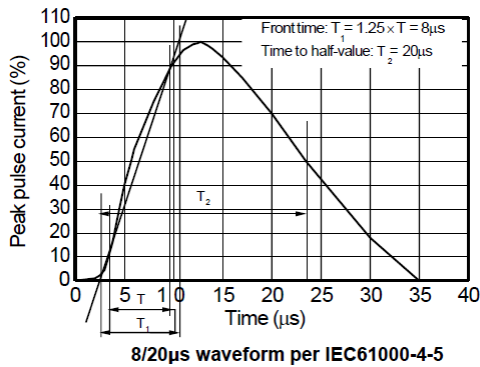

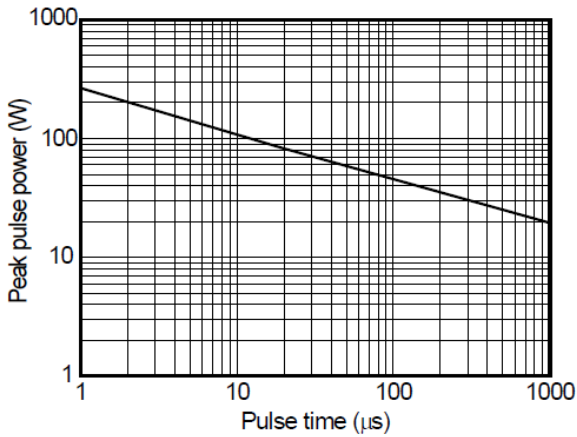


Non-repetitive peak pulse power vs. Pulse time

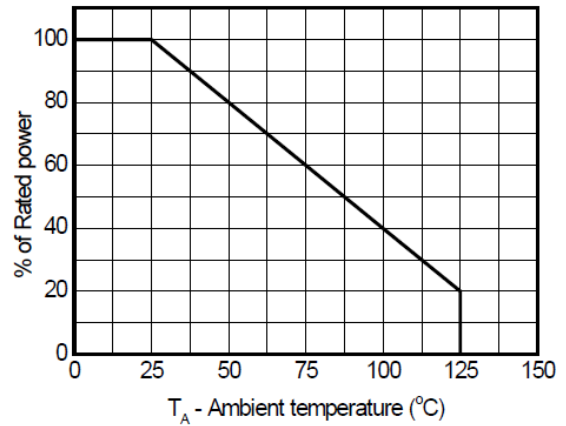

Power derating vs. Ambient temperature

Dimensions

DFN0603

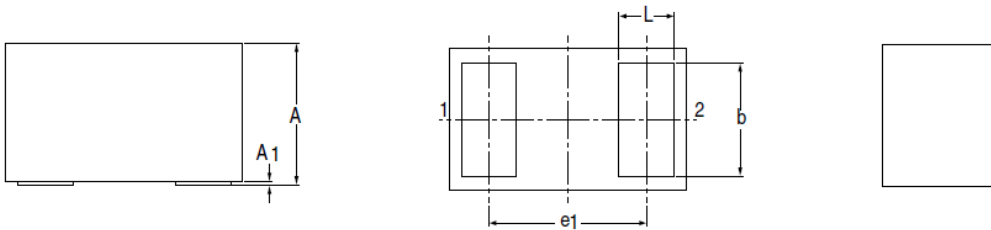

Dimensions

	Unit	A ⁽¹⁾	A ₁	b	D	E	e ₁	L
	max	0.32	0.0076	0.25	0.325	0.625		0.15
	nom						0.4	
	min	0.28		0.23	0.275	0.575		0.13

Note

- 1. Dimension A is including coating foil thickness.
- 2. The marking bar indicates the cathode.

atten (Unit: mm)

Recommended Mounting Pad Layout Unit:mm

