

Features


- 130 Watts Peak Pulse Power per Line (tp = 8/20μs)
Bidirectional Configuration
- Protects One Power or I/O Port
- ESD Protection > 40 kilovolts
- Low Clamping Voltages
- Ultra Low Capacitance: 3 pF Typical



SOD-523

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) :±30kV (air), ±30kV (contact)
- IEC 61000-4-4 (EFT) :40A (5/50ns)
- IEC 61000-4-5(Surge): 10A, 8/20μs



Applications


- Ethernet - 10/100/1000 Base T
- Cellular Phones
- Handheld - Wireless Systems
- Personal Digital Assistant (PDA)
- USB Interface

Marking	Package	Shipping
5C	SOD-523	3000/Tape&Reel

Electrical Parameters

Parameter	Symbol	Value	Units
Peak pulse power (tp=8/20us)	P _{PP}	130	Watts
Operating Temperature	T _J	-55°C~150°C	°C
Storage Temperature	T _{STG}	-55°C~150°C	°C





Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _F	Forward Current
V _F	Forward Voltage @ I _F

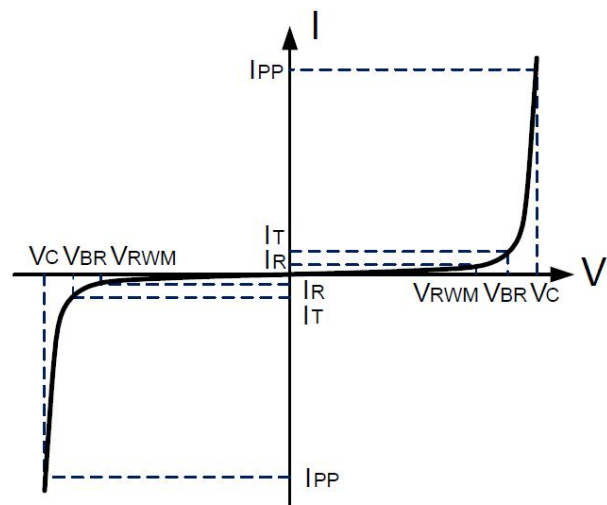


Ratings and characteristic curves ($T_A=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Condition	Min	Max	Units
Reverse Stand-off Voltage	V_{RWM}	Pin2 to 1/Pin1 to 2		5.0	V
Reverse Breakdown Voltage	$V_{BR}(\text{min})$	$I_z=1\text{mA}$	5.5	7.5	V
Reverse Leakage Current	$I_R(\text{max})$	@ V_{RWM}		0.5	μA
Clamping Voltage	V_C	$I_{PP}=10\text{A}$ $t_p=8/20\mu\text{s}$		13	V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$	15 (TYP)		pf

Typical Characteristics

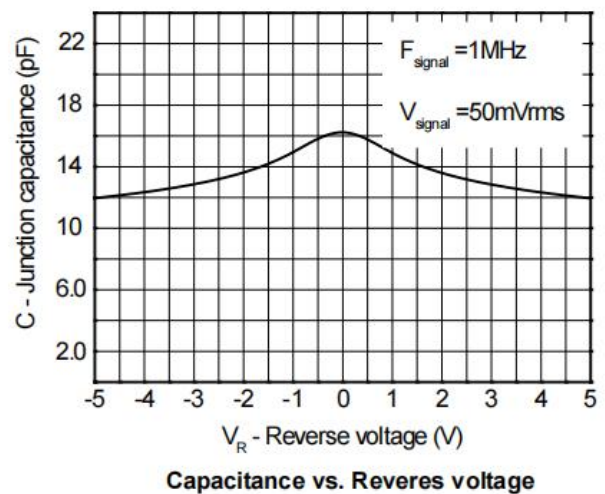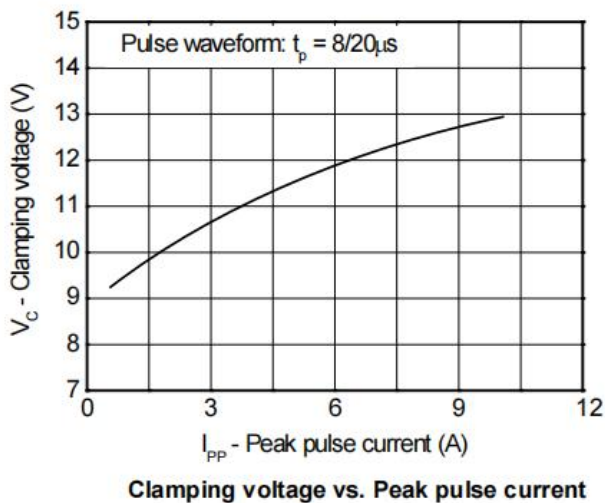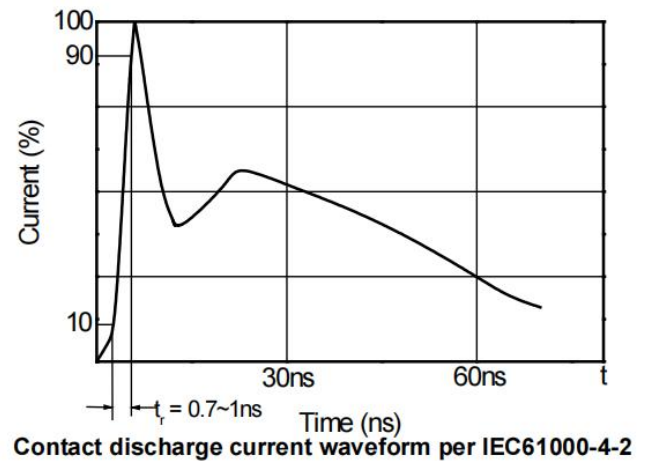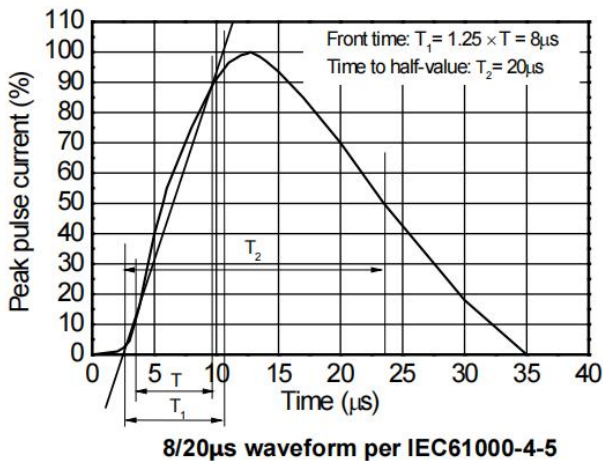

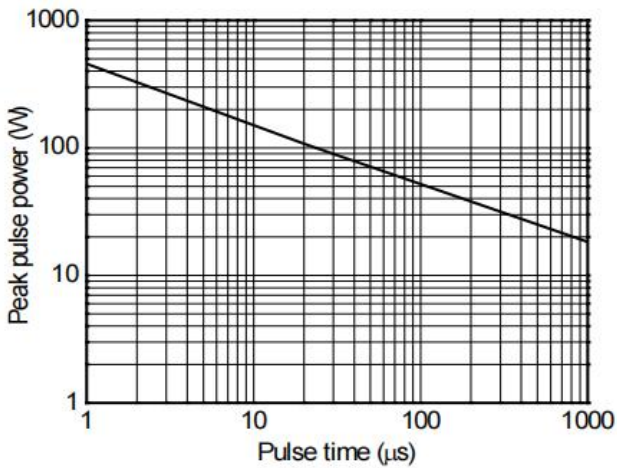


Non-repetitive peak pulse power vs. Pulse time

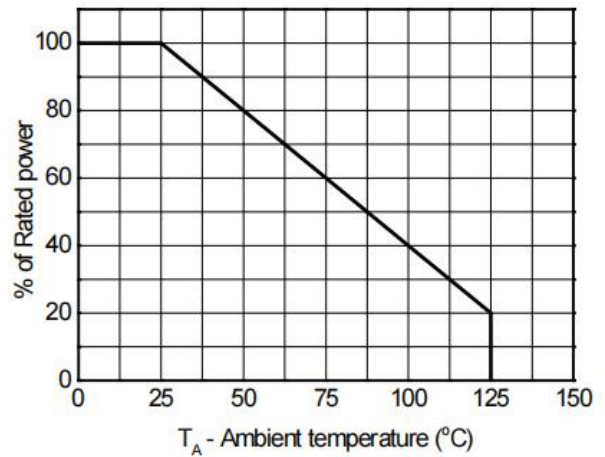

Power derating vs. Ambient temperature

Dimensions

SOD-523

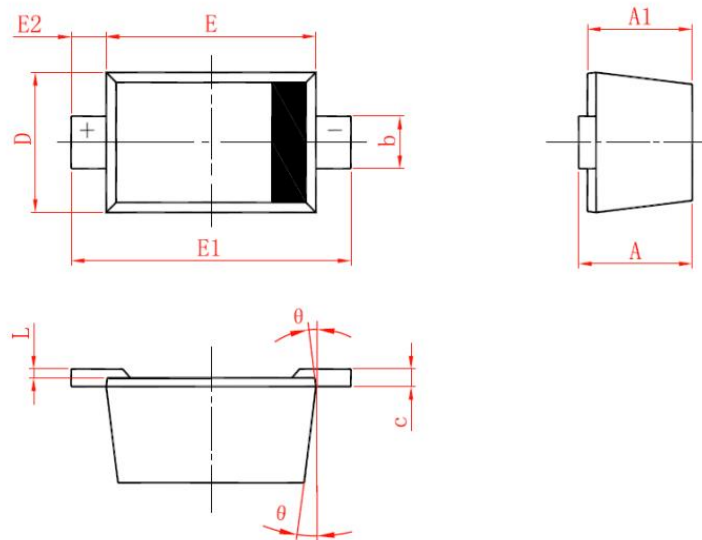

Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.510	0.640	0.770
A1	0.500	0.600	0.700
b	0.250	0.300	0.350
c	0.080	0.115	0.150
D	0.750	0.800	0.850
E	1.100	1.200	1.300
E1	1.500	1.600	1.700
E2	0.200 Ref		
L	0.010	0.040	0.070
θ	7° Ref		