
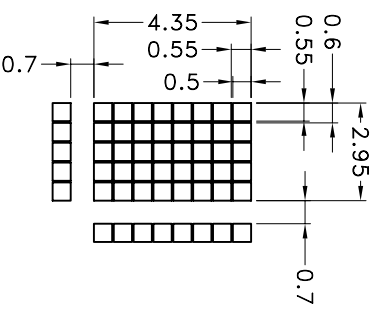


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2009-06-25
V01	更改LED 接口定义	2011-03-23

TYPE	A	B
LED B/L	13.0	8.4

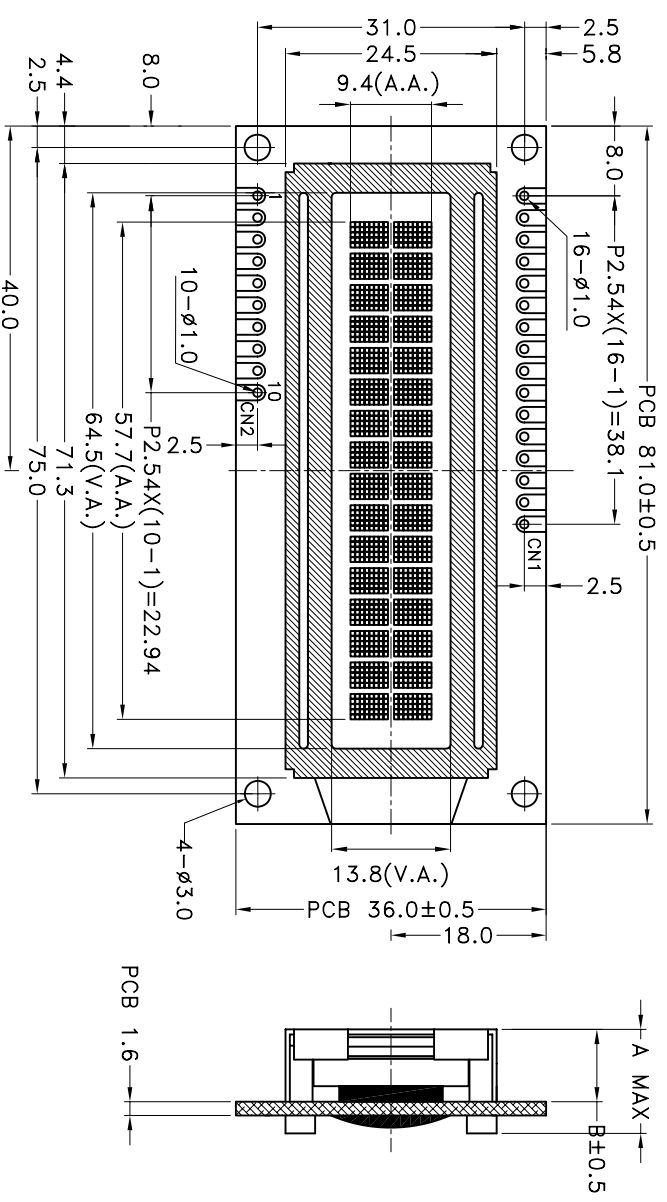

DETAIL DOTS
SCALE 4:1

CN1:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	NC	NC	NC	NC	NC	NC	NC	NC	/CS	SCLK	SI	LED+	LED-

CN2:

PIN	1	2	3	4	5	6	7	8	9	10
NAME	VSS	VDD	V0	/CS	SCLK	SI	NC	RST	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE:STN/TRANSMISSIVE/NEGATIVE/BLUE
 2. LCD DRIVING VOLTAGE:5.0V
 3. LOGIC VOLTAGE:5.0 V
 4. VIEWING DIRECTION: 6 O'CLOCK
 5. OPERATING TEMP: -10° C ~60° C
 6. STORAGE TEMP: -20° C ~70° C
 7. DRIVE MODE: 1 /16 DUTY,1 /5 BIAS
 8. BACKLIGHT:WHITE/SIDE BACKLIGHT/5.0 V
 9. OTHER:
- MECHANICAL TOL.±0.3 UNLESS SPECIFIED

NOTE:

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP		TINSHARP
SHEET: 1 OF 1	INDUSTRIAL CO.,LTD.		INDUSTRIAL CO.,LTD.
PROJECTION	MODEL	MODEL	SERIAL NUMBER
UNIT: mm	TC1602A-60	TC1602A-60	LXL0803
APP:	CHK:	DWN:	
DATE:	DATE:	DATE:	