



VERSION	CHANGE CONTENT	DATE
V01	修改模组特性	2008-04-09
V02	修改接口顺序	2011-03-16
V03	更改接口定义	2012-07-23
V04	更改工作温度	2014-08-13

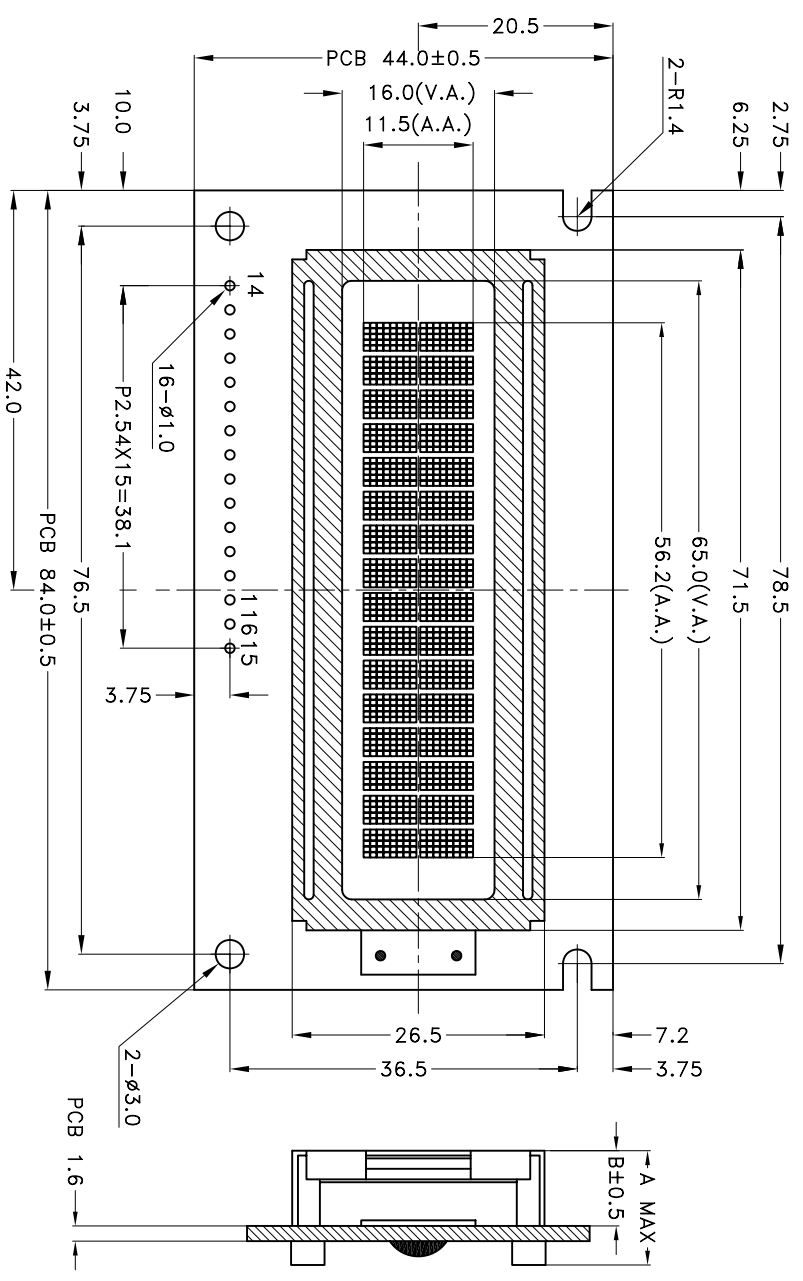

TYPE	A	B
LED B/L	12.5	7.9

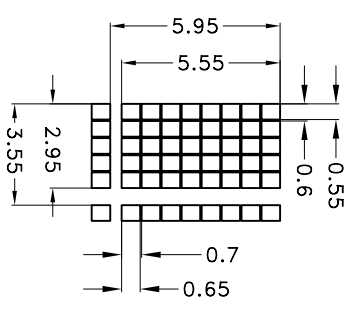

DETAIL DOTS
SCALE: 4:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED-	LED+

VIEWING

SPECIFICATIONS

1. DISPLAY TYPE: STN / TRANSFLECTIVE / POSITIVE/Y-G
2. LCD DRIVING VOLTAGE: 4.7V
3. LOGIC VOLTAGE: 5.0 V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP.: -20° C ~+70° C
6. STORAGE TEMP.: -30° C ~+80° C
7. DRIVE MODE: 1 / 16 DUTY, 1 / 5 BIAS
8. BACKLIGHT: YELLOW GREEN / BOTTOM BACKLIGHT/5.0 V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.3UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	INDUSTRIAL CO.,LTD.	INDUSTRIAL CO.,LTD.
UNIT: mm	MODEL	SERIAL NUMBER
PROJECTION	TC1602B-06	ZM00331
APP: DATE:	CHK: DATE:	DWN: DATE: