



| VERSION | CHANGE CONTENT | DATE |
|---------|----------------|------------|
| V00 | FIRST ISSUE | 2005-08-09 |
| V01 | LCD特性 | 2007-01-09 |

| TYPE | A | B |
|---------|------|-----|
| LED B/L | 13.4 | 9.4 |

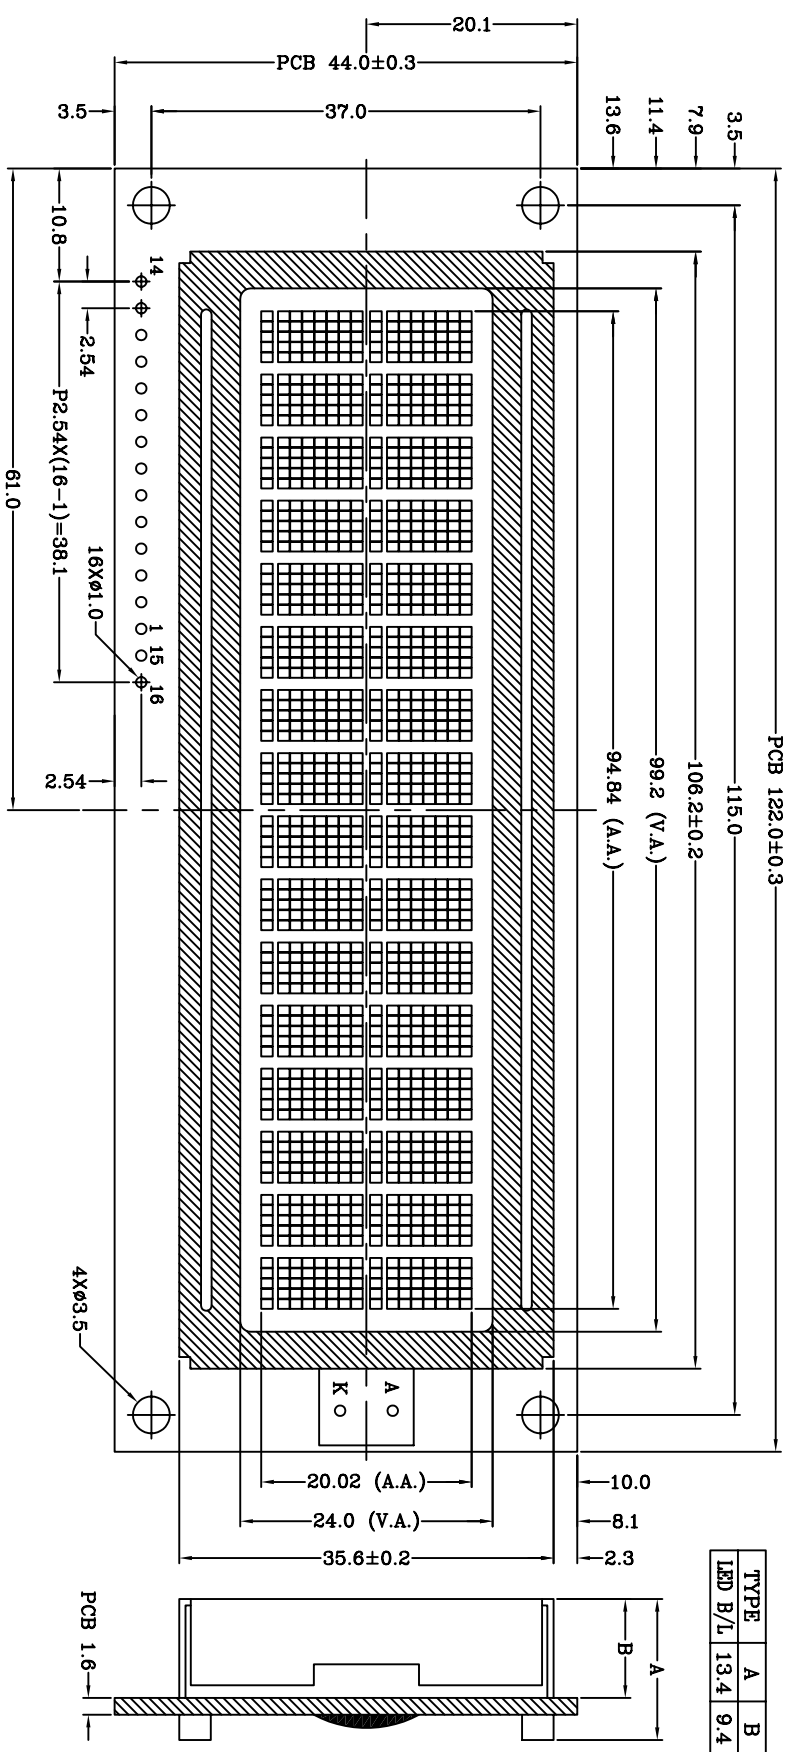

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|------|-----|-----|----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| NAME | VSS | VDD | V0 | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | K | A |

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSFLECTIVE/POSITIVE-Y-G
2. LCD DRIVING VOLTAGE: 4.7V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -1.0° C-60° C
6. STORAGE TEMP: -2.0° C-70° C
7. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
8. BACKLIGHT: YELLOW/GREEN/BOTTOM BACKLIGHT/5.0V
9. CONTROL/DRIVE IC: SPLC780D-001B-C/SPLC100A2-C
10. OTHER:

NOTE:

MECHANICAL TOL.±0.2 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT
SHEET: 1 OF 1
TINSHARP ELECTRONICS CO., LTD.

PROJECTION
UNIT: mm
MODEL: TC1602D-01
SERIAL NUMBER: YL0211

APP: _____ DATE: _____
CHK: _____ DATE: _____
DWN: _____ DATE: _____