

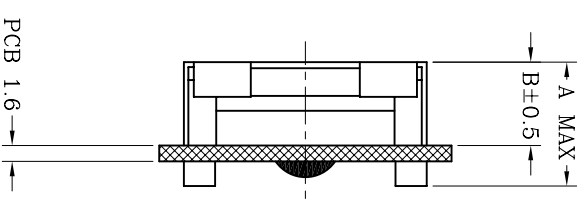


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2007-07-28
V01	修改模块结构	2009-01-07

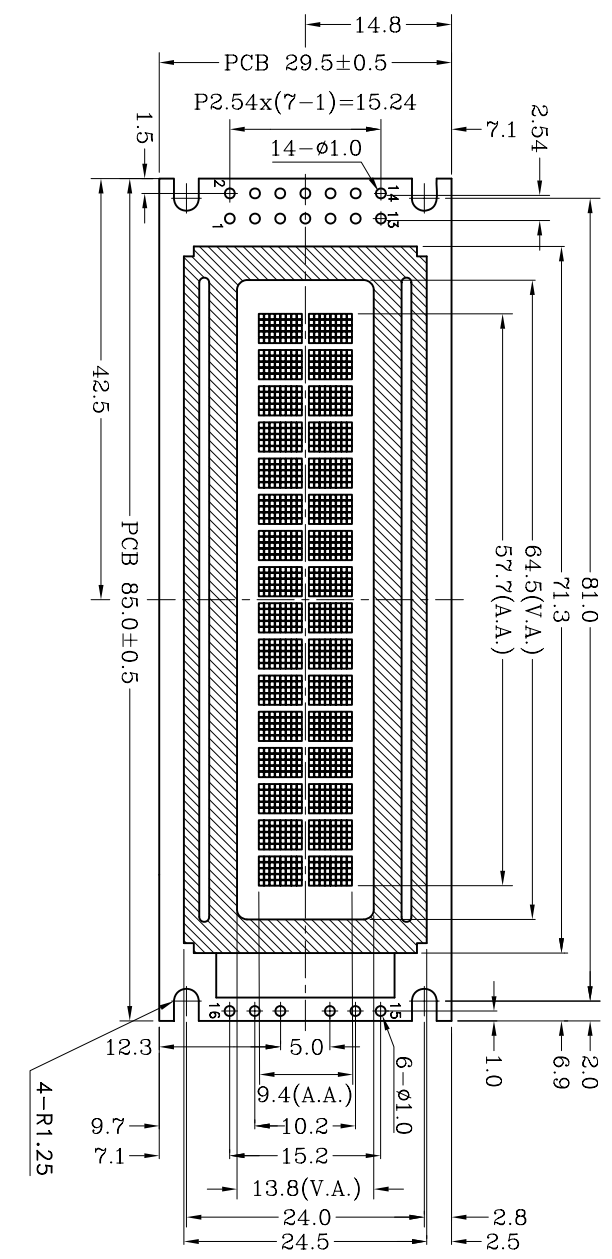

TYPE	A	B
LED B/L	13.0	8.4

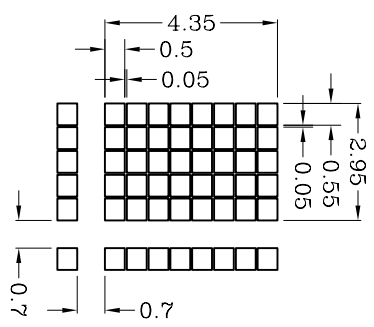

DETAIL DOTS
SCALE: 4:1

VIEWING

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VDD	VSS	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
2. LCD DRIVING VOLTAGE: 5.0V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP: -1.0° C-60° C
6. STORAGE TEMP: -20° C-70° C
7. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

DESCRIPTION:

C/D

SCALE: FIT
SHEET: 1 OF 1
TINSHARP ELECTRONICS CO.,LTD.

PROJECTION
UNIT: mm
MODEL: TC1602E-02T
SERIAL NUMBER: MLX1020

APP: _____ DATE: _____
CHK: _____ DATE: _____
DWN: _____ DATE: _____