


# EB-FCP-325-200/400-888V-0.5



		878.6/888nm Fiber Coupled Module
<b>光学性能/Optical</b>		
中心波长/Center Wavelength	nm	888
中心波长偏差/Center Wavelength Tolerance	nm	±0.5
输出功率/Output Power	W	325
光谱半高宽/Spectral Width (FWHM)	nm	0.3
95%能量NA/NA @95% Powerin	-	0.22
光纤芯径/Fiber Core	μm	200 400
光纤接头/Fiber Termination	-	SMA905
光纤长度/Fiber Length	m	1.2
波长温度系数/Wavelength-Temperature Coefficient	nm / °C	0.01
<b>电学性能/Electrical</b>		
电光转换效率/E-O Conversion Efficiency	%	50
阈值电流/Threshold Current	A	1.4
工作电流/Operating Current	A	13
工作电压/Operating Voltage	V	49.5
<b>热学性能/Thermal</b>		
工作温度/Operating Temperature	°C	0~50
存储温度/Storage Temperature	°C	-40~80
<b>其他/Others</b>		
防反射波长范围/Feedback isolation Wavelength range	nm	1030~1200
防反射效率/Feedback isolation efficiency	dB	>30
焊接温度/Soldering Temperature	°C	260 (10 sec)

## 应用领域 / Applications

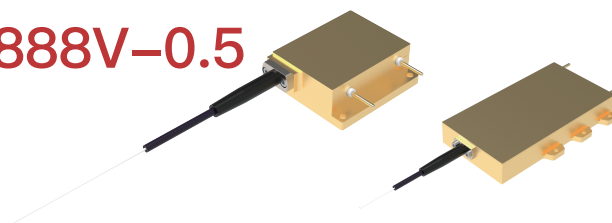

固体激光器泵浦

Solid-state Laser Pumping

## 产品特点 / Features



光斑能量分布均匀

Flat-top Beam Profile



全功率范围内波长锁定

Full Range Wavelength Locking