



EB-VTOF-1-0808-06-001



	单位 Unit	最小值 Min	典型值 Typ	最大值 Max
光学性能 /Optical				
中心波长 (Center Wavelength)	nm	802	808	814
输出功率 (Output Power)	W	0.8	1	1.2
远场发散角 (Far Field Divergence Angle)	°	19.5	20.5	21.5
光谱宽度 (Spectral Width (FWHM))	nm	/	0.77	1.5
电学性能 /Electrical				
电光转换效率 (E-O Conversion Efficiency)	%	35	37	40
斜率效率 (Slope Efficiency)	W/A	0.8	0.93	1.1
阈值电流 (Threshold Current)	A	/	0.2	0.3
工作电流 (Operating Current)	A	/	1.3	1.5
工作电压 (Operating Voltage)	V	/	2.1	2.4
几何尺寸 /Geometric Size				
发光点数量 (Emitter Number)	#		224	
发光点排列方式 (Emitter Arrangement)	#		密排 / Dense	
阵列尺寸 (Array size)	μm^2		894*891	
其他 /Others				
环保属性 (Environmental Attributes)			Rohs2.0	
测试温度 (Test Temperature)	°C		25	

备注 /Remarks

- 规格型号命名规则: EB (长光华芯缩写)-VTOFL (Vcsel TOF 缩写)-1 (输出功率) - 0808 (中心波长)-06 (中心波长偏差)-001 (结构号)
- 以上测试温度为 25 度
- 超过正常功率范围使用会缩短使用寿命
- 客户可定制波长、功率、孔径、间距等

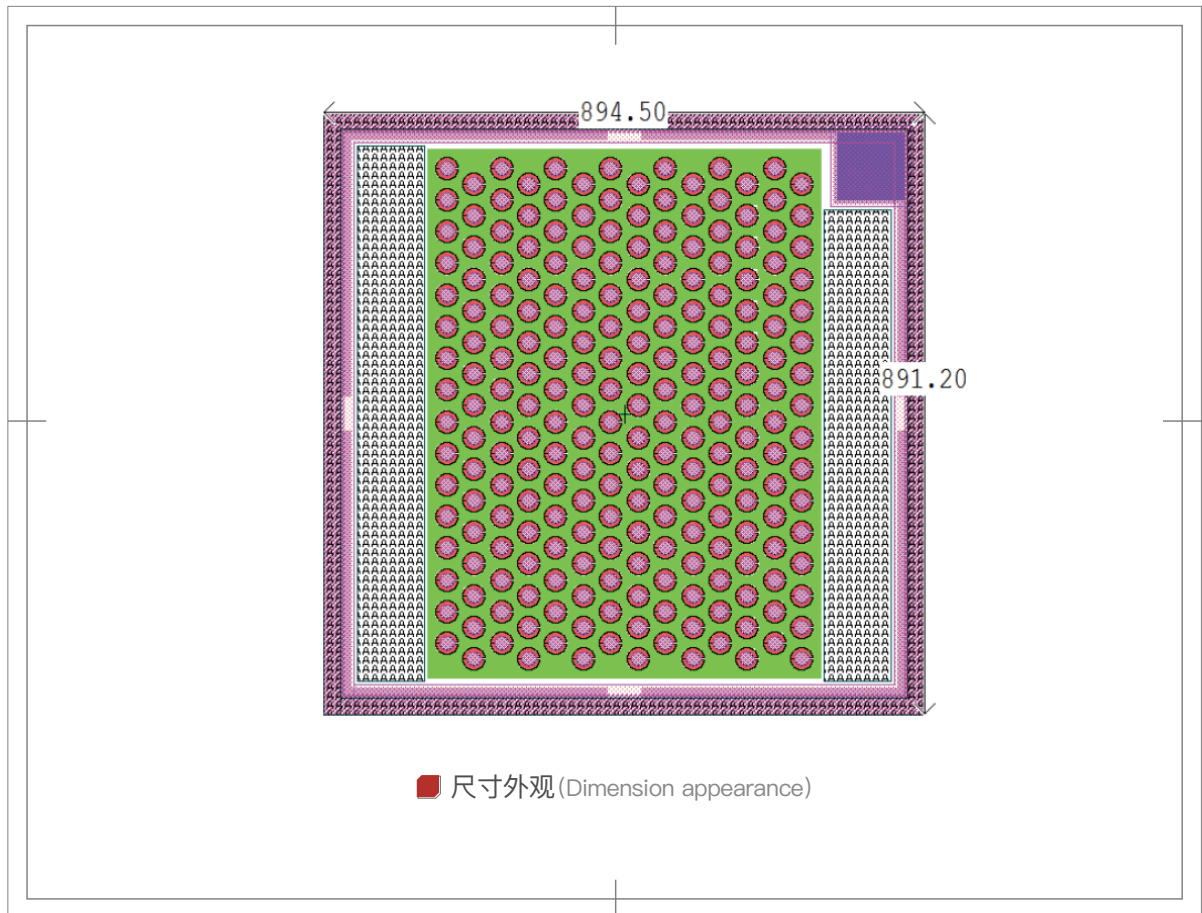

产品特点 / Product Features

应用领域 / Application Area

 高可靠性
High Reliability

 高效率
High Efficiency

 机器视觉
Machine Vision

 安防照明
Security Lighting

 低发散角
Low Divergence Angle



苏州长光华芯光电技术股份有限公司 SUZHOU EVERBRIGHT PHOTONICS CO., LTD

江苏省苏州市高新区科技城漓江路56号 No.56, Lijiang Road, SND, Suzhou, China

www.everbrightphotonics.com Sales@everbrightphotonics.com +86-512-66896988

声明：长光华芯为客户提供卓越的产品和优质的服务。我们可能更改规格和产品描述，届时将不另行通知。如需详细信息，请联系长光华芯销售代表。
Notice: Everbright keep improving its products to provide our customers with outstanding quality and reliability. We may change the specification and product description without notice at any time. For complete details, please contact Everbright sales representative.

