




Type : PQ Cores



规格 Type	尺寸Dimensions (mm)												图号 Fig.
	A	B	C	D	E	F	G	I	AI	CI	G1	II	
PQ-20.5-14.0-5.10	20.50 ± 0.40	5.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	18.00 ± 0.40	2.15 ± 0.15	12.00 min	4.00mi n	-	-	-	-	1
PQ-20.5-14.0-8.10	20.50 ± 0.40	8.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	18.00 ± 0.40	5.15 ± 0.15	12.00 min	4.00mi n	-	-	-	-	1
PQ-20.5-14.00-10.10	20.50 ± 0.40	10.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	18.00 ± 0.40	7.15 ± 0.15	12.00 min	4.00mi n	-	-	-	-	1
PQ-21.50-14.00-8.10	21.50 ± 0.40	8.10 ± 0.10	14.00 ± 0.40	8.70 ± 0.30	19.00 ± 0.40	5.15 ± 0.15	13.00 min	4.00mi n	-	-	-	-	1
PQ-26.5-19.0-10.08	26.50 ± 0.45	10.08 +	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.45	5.75 ± 0.15	15.50 min	5.25mi n	-	-	-	-	1
PQ-26.5-19.00-12.38	26.50 ± 0.45	12.38 +	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.45	8.05 ± 0.15	15.50 min	5.25mi n	-	-	-	-	1
PQ-26.5-19.00-10.33	26.50 ± 0.40	10.33 ± 0.13	19.00 ± 0.45	12.00 ± 0.20	22.30 min	6.00 ± 0.15	15.50 min	-	-	-	-	-	1
PQ-26.5-19.00-7.19	26.50 ± 0.45	7.19 ± 0.20	19.00 ± 0.35	12.00 ± 0.20	22.50 ± 0.45	2.86 ± 0.20	15.50 min	6.08 ± 0.20	-	-	-	-	3
PQ-27.30-19.00-10.10	27.30 ± 0.46	10.10 ± 0.12	19.00 ± 0.45	12.00 ± 0.20	22.50 ± 0.46	5.75 ± 0.15	15.50 min	6.00mi n	-	-	-	-	2
PQ-27.30-19.00-10.10	27.30 ± 0.46	10.10 ± 0.13	19.00 ± 0.45	12.00 ± 0.20	22.50 min	5.75 ± 0.15	16.80 min	6.00mi n	-	-	-	-	2
PQ-27.00-19.00-10.20	27.00 ± 0.50	10.20 ± 0.15	19.00 ± 0.50	11.80 ± 0.25	22.50 min	6.00 ± 0.30	16.50 min	-	-	-	-	-	1
PQ-31.50-21.50-8.20	31.50 ± 0.50	8.20 ± 0.20	21.50 ± 0.40	14.60 ± 0.15	22.65 ± 0.50	5.30 ± 0.20	27.70 ± 0.40	-	-	-	-	-	6
PQ-32.0-22.0-12.55	32.00 ± 0.50	12.55 ± 0.25	22.00 ± 0.50	13.30 ± 0.25	27.50 ± 0.50	8.25 ± 0.20	19.75 min	-	-	-	-	-	3
PQ-32.00-22.00-12.55	32.00 ± 0.50	12.55 ± 0.20	22.00 ± 0.50	13.30 ± 0.20	27.50 ± 0.50	8.08 ± 0.20	19.50 min	-	-	-	-	-	5
PQ-32.20-22.10-12.40	32.20 ± 0.50	12.40 ± 0.20	22.10 ± 0.50	13.50 ± 0.20	27.50 ± 0.50	8.05 ± 0.15	19.50 min	6.00ref	-	-	-	-	5

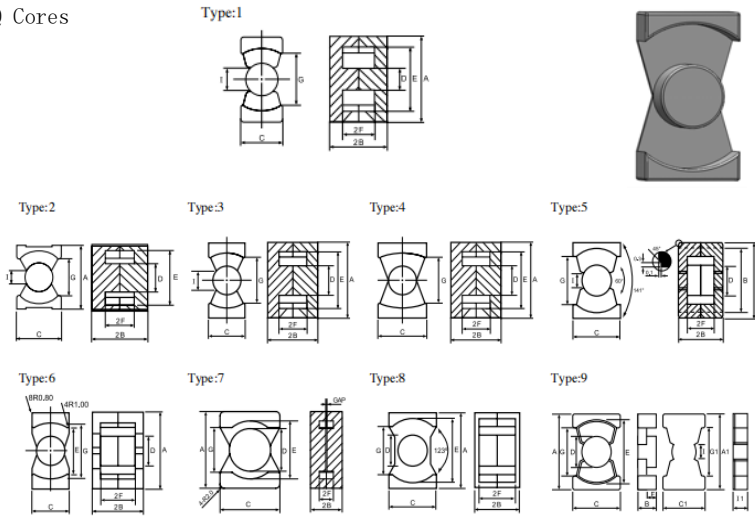

湖南创一电子科技股份有限公司
CYGE ELECTRONIC TECHNOLOGY (HUNAN) CO.,LTD

规格 Type	尺寸Dimensions (mm)												图号 Fig.
	A	B	C	D	E	F	G	I	A1	C1	G1	I1	
PQ-32.00-22.00-12.50	32.00 ± 0.50	12.50 ± ± 0.20	22.00 ± ± 0.40	13.45 ± ± 0.25	27.50 ± ± 0.50	8.10 ± 0.20	19.75 min	7.45 ± 0.20	-	-	-	-	1
PQ-35.0-18.60-6.10	35.00 ± 0.65	6.10 ± 0.15	18.60 ± ± 0.50	13.00 ± ± 0.20	29.70 ± ± 0.60	3.40 ± 0.15	24.72r ef	-	-	-	-	-	4
PQ-35.10-26.00-20.15	35.10 ± 0.60	20.15 +	26.00 ± ± 0.50	14.40 ± ± 0.35	31.50 min	15.50 ± ± 0.15	23.50 min	5.50mi n	-	-	-	-	1
PQ-35.00-26.00-15.00	35.00 + 0.70/-0.5	15.00 ± ± 0.15	26.00 ± ± 0.50	14.35 ± ± 0.25	32.00 ± ± 0.50	10.70 ± ± 0.20	23.85 ± 0.50	-	-	-	-	-	8
PQ-35.20-26.0-23.90	35.20 ± 0.75	23.90 ± ± 0.15	26.00 ± ± 0.50	14.15 ± ± 0.25	31.50 min	19.00 ± ± 0.15	23.50 min	5.80ref	35.20 ± ± 0.75	26.00 ± ± 0.50	23.50 min	5.00 ± 0.15	9
PQ-35.10-26.0-15.00	35.10 ± 0.60	15.00 ± ± 0.15	26.00 ± ± 0.50	14.35 ± ± 0.25	32.00 ± ± 0.50	10.13 ± ± 0.15	24.00 ± 0.50	5.60mi n	-	-	-	-	1
PQ-35.20-26.00-23.88	35.20 ± 0.50	23.88 ± ± 0.25	26.00 ± ± 0.50	14.15 ± ± 0.30	32.00 min	19.00 ± ± 0.25	23.50 min	5.80ref	35.20 ± ± 0.50	26.00 ± ± 0.50	23.50 min	5.00 ± 0.15	9
PQ-35.10-26.00-17.40	35.10 ± 0.60	17.40 ± ± 0.30	26.00 ± ± 0.50	14.35 ± ± 0.35	31.00 min	12.50 ± ± 0.40	23.50 min	5.20mi n	-	-	-	-	1
PQ-36.00-29.0-7.7	36.00 ± 0.60	7.70 ± 0.15	29.00 ± ± 0.50	20.00 ± ± 0.30	27.40 ± ± 0.40	3.43 ± 0.15	21.00 ± 0.30	-	-	-	-	-	7
PQ-38.00-21.32-5.30	38.00 ± 0.50	5.30 ± 0.15	21.32 ± ± 0.40	14.30 ± ± 0.25	32.80 ± ± 0.50	2.45 ± 0.15	25.84 min	-	-	-	-	-	4
PQ-40.30-28.0-20.5	40.30 ± 0.30	20.50 ± ± 0.30	28.00 ± ± 0.40	15.00 ± ± 0.30	35.70 min	15.30 ± ± 0.30	28.10 min	-	-	-	-	-	3
PQ-40.30-28.0-14.60	40.30 ± 0.40	14.60 ± ± 0.20	28.00 ± ± 0.40	14.80 ± ± 0.30	36.40 min	9.50 ± 0.20	28.80 ± 0.40	6.50 ± 0.20	40.30 ± ± 0.40	28.00 ± ± 0.40	28.80 ± ± 0.40	5.00 ± 0.10	9
PQ-50.0-32.0-25.0	50.00 ± 0.70	25.00 ± ± 0.20	32.00 ± ± 0.60	20.00 ± ± 0.35	44.00 ± ± 0.70	18.00 ± ± 0.20	31.50 min	-	-	-	-	-	1



规格 Type	磁芯参数					图号 Fig.
	Cl(mm ⁻¹)	Le (mm)	Ae(m ²)	Ve(m ³)	Wt(g/set)	
PQ-20.5-14.0-5.10	0.42	25.61	61.32	1570.4	9.4	1
PQ-20.5-14.0-8.10	0.61	37.6	61.9	2330	12.94	1
PQ-20.5-14.00-10.10	0.74	45.4	62	2790	15.48	1
PQ-21.50-14.00-8.10	0.62	37.41	60.4	2246.1	13.2	1
PQ-26.5-19.0-10.08	0.37	45	121	5470	28.4	1
PQ-26.5-19.00-12.38	0.45	54.3	120	6530	30	1
PQ-26.5-19.00-10.33	0.38	44.21	117.38	5189.4	30.6	1
PQ-26.5-19.00-7.19	0.27	32.6	119	3878	23.32	3
PQ-27.30-19.00-10.10	0.36	43.35	119.93	5198.8	30.3	2
PQ-27.30-19.00-10.10	0.39	44.19	114.97	5080.5	28.4	2
PQ-27.00-19.00-10.20	1.7	44.98	111.75	5026.5	28.6	1
PQ-31.50-21.50-8.20	0.68	41.69	60.92	2539.4	27.8	6
PQ-32.0-22.0-12.55	0.44	74.6	165.8	12369	47	3
PQ-32.00-22.00-12.55	0.39	55.41	140.52	7786.2	46.68	5
PQ-32.20-22.10-12.40	0.38	54.24	144.46	7835.9	46.8	5
PQ-32.00-22.00-12.50	0.38	58.5	153.1	8956	47.7	1
PQ-35.0-18.60-6.10	0.4	42.96	108.28	4651.8	12	4
PQ-35.10-26.00-20.15	0.53	86.48	164.69	14242	81.54	1
PQ-35.00-26.00-15.00	0.42	75.1	176.9	13285	64.3	8
PQ-35.20-26.0-23.90	0.42	75.2	181.2	13629	64	9
PQ-35.10-26.0-15.00	0.39	64.72	165.17	10690	64.32	1
PQ-35.20-26.00-23.88	0.37	68.71	183.66	12619	62.65	9
PQ-35.10-26.00-17.40	0.45	74.11	163.39	12109	73.88	1
PQ-36.00-29.0-7.7	0.24	37.65	159.64	6011.5	30.44	7
PQ-38.00-21.32-5.30	0.57	48.54	85.03	4127.4	26.96	4
PQ-40.30-28.0-20.5	0.52	93.57	180.2	16860	95.5	3
PQ-40.30-28.0-14.60	0.3	51.29	169.59	8871.5	57.3	9
PQ-50.0-32.0-25.0	0.34	113.8	333.7	37975	195	1