

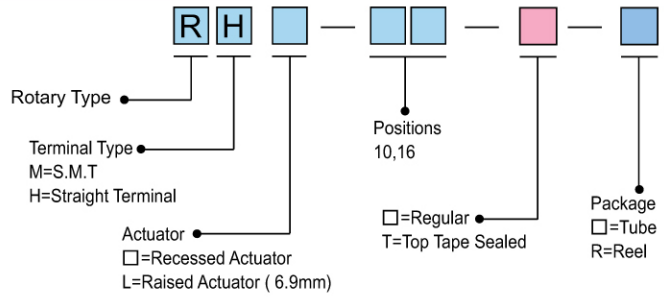




RS SERIES

10x10mm Rotary Type

HOW TO ORDER



◆ Features

- 10 or 16 positions available
- Recessed button type
- Vertical & right angle type
- BCD or Hexadecimal

◆ Applications

- Building & Home automation
- White goods
- Electronic instrument

◆ SPECIFICATION

Items		Standard	Package Tube:50pcs/tube
Environmental	Operation Temperature Range	-25℃ to +70℃	
	Storage Temperature Range	-40℃ to +85℃	
Electrical performance	Electrical Life	2,000 Steps	
	Non-Switching Rating	100mA,50VDC	
	Switching Rating	25mA,24VDC	
Mechanical performance	Operating force	500gf-cm max	

◆ DIAGRAM

No.	Dimensions	Circuit Diagram PCB Layout																																																																																												
1	<p>● RH-16</p>	<p>Output Coding</p> <table border="1"> <thead> <tr> <th rowspan="2">TYPE</th> <th rowspan="2">POSITION</th> <th colspan="4">CODE</th> </tr> <tr> <th>1</th> <th>2</th> <th>4</th> <th>8</th> </tr> </thead> <tbody> <tr><td rowspan="10">○10</td><td>0</td><td></td><td></td><td></td><td></td></tr> <tr><td>1</td><td>●</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td>●</td><td></td><td></td></tr> <tr><td>3</td><td>●</td><td></td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td>●</td><td></td></tr> <tr><td>5</td><td>●</td><td></td><td>●</td><td></td></tr> <tr><td>6</td><td></td><td>●</td><td>●</td><td></td></tr> <tr><td>7</td><td>●</td><td>●</td><td>●</td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td>●</td></tr> <tr><td>9</td><td>●</td><td></td><td></td><td></td></tr> <tr><td rowspan="6">○16</td><td>A</td><td></td><td>●</td><td></td><td>●</td></tr> <tr><td>B</td><td>●</td><td>●</td><td></td><td>●</td></tr> <tr><td>C</td><td></td><td></td><td>●</td><td></td></tr> <tr><td>D</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>E</td><td></td><td>●</td><td>●</td><td>●</td></tr> <tr><td>F</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> </tbody> </table>	TYPE	POSITION	CODE				1	2	4	8	○10	0					1	●				2		●			3	●				4			●		5	●		●		6		●	●		7	●	●	●		8				●	9	●				○16	A		●		●	B	●	●		●	C			●		D	●	●	●	●	E		●	●	●	F	●	●	●	●
TYPE	POSITION	CODE																																																																																												
		1	2	4	8																																																																																									
○10	0																																																																																													
	1	●																																																																																												
	2		●																																																																																											
	3	●																																																																																												
	4			●																																																																																										
	5	●		●																																																																																										
	6		●	●																																																																																										
	7	●	●	●																																																																																										
	8				●																																																																																									
	9	●																																																																																												
○16	A		●		●																																																																																									
	B	●	●		●																																																																																									
	C			●																																																																																										
	D	●	●	●	●																																																																																									
	E		●	●	●																																																																																									
	F	●	●	●	●																																																																																									
2	<p>● RH-10</p>																																																																																													

ROTARY CODED SWITCH