



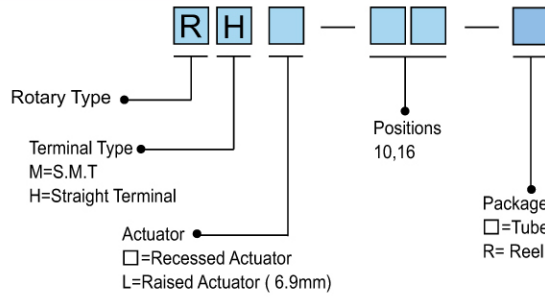

# RS SERIES

## 10x10mm Rotary Type

### HOW TO ORDER

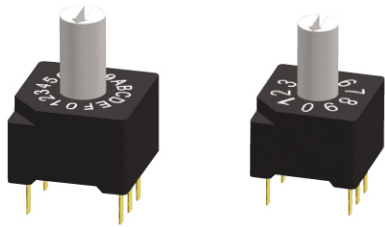

### ◆ Features

- 10 or 16 positions available
- Raised button type
- Vertical & right angle type
- BCD or Hexadecimal

### ◆ Applications

- Building & Home automation
- White goods
- Electronic instrument

### ◆ SPECIFICATION

Items		Standard
Environmental	Operation Temperature Range	-25℃ to +70℃
	Storage Temperature Range	-40℃ to +85℃
Electrical performance	Electrical Life	2,000 Steps
	Non-Switching Rating	100mA, 50VDC
	Switching Rating	25mA, 24VDC
Mechanical performance	Operating force	500gf-cm max

### Package

Tube: 50pcs/tube

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram																																																																																													
		PCB Layout																																																																																													
1	<p>● RHL-16</p>	<table border="1"> <thead> <tr> <th colspan="5">Output Coding</th> </tr> <tr> <th>TYPE</th> <th>POSITION</th> <th>1</th> <th>2</th> <th>4</th> <th>8</th> </tr> </thead> <tbody> <tr><td rowspan="10">○10</td><td>0</td><td></td><td></td><td></td><td></td></tr> <tr><td>1</td><td>●</td><td></td><td></td><td></td></tr> <tr><td>2</td><td></td><td>●</td><td></td><td></td></tr> <tr><td>3</td><td>●</td><td>●</td><td></td><td></td></tr> <tr><td>4</td><td></td><td></td><td>●</td><td></td></tr> <tr><td>5</td><td>●</td><td>●</td><td>●</td><td></td></tr> <tr><td>6</td><td></td><td>●</td><td>●</td><td></td></tr> <tr><td>7</td><td>●</td><td>●</td><td>●</td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td>●</td></tr> <tr><td>9</td><td>●</td><td></td><td></td><td>●</td></tr> <tr><td rowspan="6">○16</td><td>A</td><td>●</td><td>●</td><td></td><td></td></tr> <tr><td>B</td><td>●</td><td></td><td>●</td><td></td></tr> <tr><td>C</td><td></td><td>●</td><td>●</td><td></td></tr> <tr><td>D</td><td>●</td><td>●</td><td>●</td><td></td></tr> <tr><td>E</td><td></td><td>●</td><td>●</td><td>●</td></tr> <tr><td>F</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> </tbody> </table>	Output Coding					TYPE	POSITION	1	2	4	8	○10	0					1	●				2		●			3	●	●			4			●		5	●	●	●		6		●	●		7	●	●	●		8				●	9	●			●	○16	A	●	●			B	●		●		C		●	●		D	●	●	●		E		●	●	●	F	●	●	●	●
Output Coding																																																																																															
TYPE	POSITION	1	2	4	8																																																																																										
○10	0																																																																																														
	1	●																																																																																													
	2		●																																																																																												
	3	●	●																																																																																												
	4			●																																																																																											
	5	●	●	●																																																																																											
	6		●	●																																																																																											
	7	●	●	●																																																																																											
	8				●																																																																																										
	9	●			●																																																																																										
○16	A	●	●																																																																																												
	B	●		●																																																																																											
	C		●	●																																																																																											
	D	●	●	●																																																																																											
	E		●	●	●																																																																																										
	F	●	●	●	●																																																																																										
2	<p>● RHL-10</p>																																																																																														

ROTARY CODED SWITCH