




■ 型号表示方法

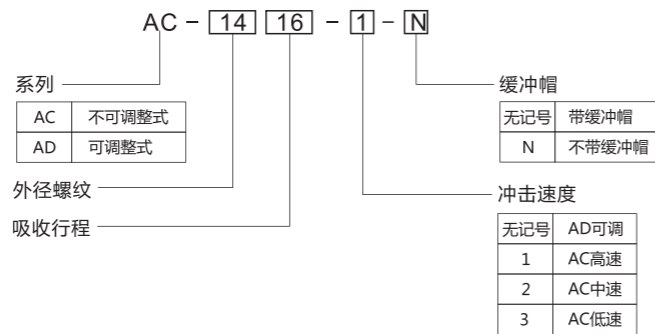


■ 规格表


| 型号 | 行程mm | 最大吸收能量 Nm | 小时吸收能量 Nm | 最大有效重量 kg | | | 最高冲击速度 m/s | | | 工作温度℃ |
|---------|------|-----------|-----------|-----------|------|------|------------|-----|---|--------|
| | | | | 1 | 2 | 3 | 1 | 2 | 3 | |
| AC-0806 | 6 | 2 | 8800 | 0.5 | 2 | 6 | 4 | 2 | 1 | -36~80 |
| AC-1005 | 5 | 3 | 10800 | 1 | 3 | 7 | 4 | 2 | 1 | -36~80 |
| AC-1008 | 8 | 4 | 15200 | 2 | 4 | 9 | 4 | 2 | 1 | -36~80 |
| AC-1210 | 10 | 5 | 17640 | 5 | 10 | 30 | 4 | 2 | 1 | -36~80 |
| AC-1412 | 12 | 18 | 30000 | 8 | 50 | 100 | 4 | 2 | 1 | -36~80 |
| AC-1416 | 16 | 20 | 36000 | 10 | 70 | 150 | 4 | 2 | 1 | -36~80 |
| AC-1425 | 25 | 30 | 38000 | 15 | 100 | 180 | 4 | 2 | 1 | -36~80 |
| AC-2020 | 20 | 40 | 40000 | 30 | 200 | 700 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2030 | 30 | 50 | 48000 | 30 | 200 | 700 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2040 | 40 | 60 | 55000 | 50 | 300 | 900 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2050 | 50 | 70 | 60000 | 60 | 400 | 1200 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2525 | 25 | 80 | 54000 | 200 | 800 | 1300 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2540 | 40 | 120 | 75000 | 300 | 1000 | 1500 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2550 | 50 | 130 | 90000 | 200 | 1100 | 1600 | 4.5 | 2.5 | 1 | -36~80 |
| AC-2580 | 80 | 150 | 120000 | 300 | 1300 | 2000 | 4 | 2.5 | 1 | -36~80 |
| AC-2725 | 25 | 140 | 85000 | 400 | 1000 | 2200 | 4 | 2.5 | 1 | -36~80 |
| AC-2750 | 50 | 200 | 95000 | 600 | 1500 | 2500 | 4 | 2.5 | 1 | -36~80 |
| AC-3325 | 25 | 160 | 75000 | 800 | 2000 | 2800 | 4 | 2.5 | 1 | -36~80 |
| AC-3350 | 50 | 280 | 85000 | 1200 | 2500 | 3400 | 4 | 2.5 | 1 | -36~80 |
| AC-3660 | 60 | 300 | 150000 | 1500 | 2800 | 4000 | 4 | 2.5 | 1 | -36~80 |

| 型号 | 行程mm | 最大吸收能量 Nm | 小时吸收能量 Nm | 最大有效重量 kg | 最高冲击速度 m/s | 工作温度℃ |
|----------|------|-----------|-----------|-----------|------------|--------|
| AD-1007 | 7 | 5 | 12400 | 12 | 3.5 | -36~80 |
| AD-1210 | 10 | 6 | 17640 | 30 | 3.5 | -36~80 |
| AD-1410 | 10 | 20 | 25000 | 80 | 3.5 | -36~80 |
| AD-1612 | 12 | 22 | 28000 | 160 | 3.5 | -36~80 |
| AD-2016 | 16 | 25 | 30000 | 200 | 3.5 | -36~80 |
| AD-2020 | 20 | 30 | 30000 | 250 | 3.5 | -36~80 |
| AD-2025 | 25 | 39 | 30000 | 312 | 3.5 | -36~80 |
| AD-2525 | 25 | 85 | 54000 | 400 | 3.5 | -36~80 |
| AD-2530 | 30 | 95 | 60000 | 480 | 3.5 | -36~80 |
| AD-2540 | 40 | 100 | 80000 | 700 | 3.5 | -36~80 |
| AD-2550 | 50 | 130 | 90000 | 720 | 4 | -36~80 |
| AD-2580 | 80 | 150 | 120000 | 800 | 4 | -36~80 |
| AD-2725 | 25 | 140 | 85000 | 560 | 4 | -36~80 |
| AD-2750 | 50 | 200 | 95000 | 1000 | 4 | -36~80 |
| AD-3650 | 50 | 350 | 100000 | 1400 | 4 | -36~80 |
| AD-4225 | 25 | 260 | 125000 | 3000 | 4.5 | -36~80 |
| AD-4250 | 50 | 500 | 150000 | 4000 | 4.5 | -36~80 |
| AD-4275 | 75 | 750 | 180000 | 6000 | 4.5 | -36~80 |
| AD-64050 | 50 | 2080 | 185000 | 12727 | 2 | -36~80 |
| AD-64100 | 100 | 4280 | 204000 | 18181 | 2 | -36~80 |
| AD-64150 | 150 | 6150 | 248000 | 23636 | 2 | -36~80 |

■ 外形尺寸图 (mm)

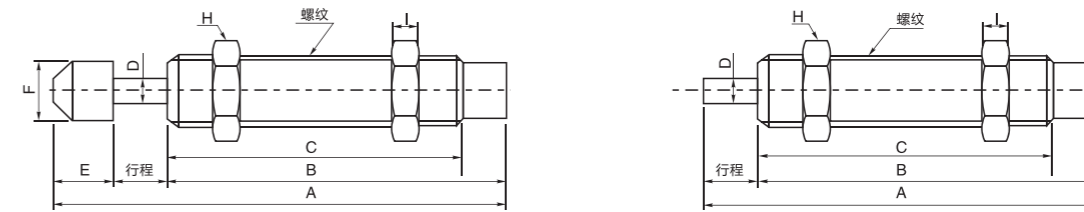

| 型号 (MODEL) | 螺纹公称 (Thread) | 行程 (Stroke) (mm) | A | B | C | D | E | F | H | I |
|------------|---------------|------------------|-------|-------|------|---|------|------|------|----|
| AC-0806 | M8×1.0 | 6 | 50 | 38 | 33 | 3 | 6 | 6.6 | 11 | 3 |
| AC-0806-N | M8×1.0 | 6 | 44 | 38 | 33 | 3 | - | - | 11 | 3 |
| AC-1005 | M10×1.0 | 5 | 38.7 | 27.7 | 22.9 | 3 | 6 | 8.6 | 12.7 | 3 |
| AC-1005-N | M10×1.0 | 5 | 32.7 | 27.7 | 22.9 | 3 | - | - | 12.7 | 3 |
| AC-1008 | M10×1.0 | 8 | 57 | 43 | 38 | 3 | 6 | 8.6 | 12.7 | 3 |
| AC-1008-N | M10×1.0 | 8 | 51 | 43 | 38 | 3 | - | - | 12.7 | 3 |
| AC-1210 | M12×1.0 | 10 | 69.5 | 50 | 45.5 | 3 | 9.5 | 10.3 | 14 | 4 |
| AC-1210-N | M12×1.0 | 10 | 60 | 50 | 45.5 | 3 | - | - | 14 | 4 |
| AC-1412 | M14×1.5 | 12 | 102.3 | 76 | 67 | 4 | 14.3 | 12 | 19 | 6 |
| AC-1412-N | M14×1.5 | 12 | 88 | 76 | 67 | 4 | - | - | 19 | 6 |
| AC-1416 | M14×1.5 | 16 | 125.3 | 95 | 86 | 4 | 14.3 | 12 | 19 | 6 |
| AC-1416-N | M14×1.5 | 16 | 111 | 95 | 86 | 4 | - | - | 19 | 6 |
| AC-1425 | M14×1.5 | 25 | 149.3 | 110.2 | 101 | 4 | 14.3 | 12 | 19 | 6 |
| AC-1425-N | M14×1.5 | 25 | 135 | 110.2 | 101 | 4 | - | - | 19 | 6 |
| AC-2020 | M20×1.5 | 20 | 148 | 110 | 101 | 6 | 18 | 18 | 26 | 8 |
| AC-2020-N | M20×1.5 | 20 | 130 | 110 | 101 | 6 | - | - | 26 | 8 |
| AC-2030 | M20×1.5 | 30 | 158 | 110 | 101 | 6 | 18 | 18 | 26 | 8 |
| AC-2030-N | M20×1.5 | 30 | 140 | 110 | 101 | 6 | - | - | 26 | 8 |
| AC-2040 | M20×1.5 | 40 | 179 | 121 | 110 | 6 | 18 | 18 | 26 | 8 |
| AC-2040-N | M20×1.5 | 40 | 161 | 121 | 110 | 6 | - | - | 26 | 8 |
| AC-2050 | M20×1.5 | 50 | 235 | 167 | 158 | 6 | 18 | 18 | 26 | 8 |
| AC-2050-N | M20×1.5 | 50 | 217 | 167 | 158 | 6 | - | - | 26 | 8 |
| AC-2525 | M25×1.5 | 25 | 155.5 | 111 | 101 | 8 | 19.5 | 22 | 32 | 10 |
| AC-2525-N | M25×1.5 | 25 | 136 | 111 | 101 | 8 | - | - | 32 | 10 |
| AC-2725 | M27×1.5 | 25 | 143.8 | 100 | 87 | 8 | 18.8 | 22 | 36 | 10 |
| AC-2725-N | M27×1.5 | 25 | 125 | 100 | 87 | 8 | - | - | 36 | 10 |
| AC-2750 | M27×1.5 | 50 | 208.8 | 140 | 127 | 8 | 18.8 | 22 | 36 | 10 |
| AC-2750-N | M27×1.5 | 50 | 190 | 140 | 127 | 8 | - | - | 36 | 10 |

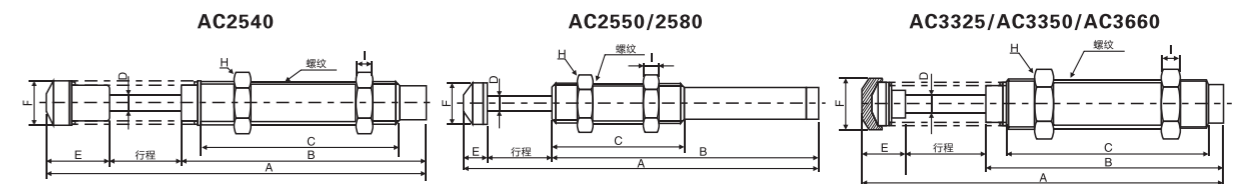


| 型号 (MODEL) | 螺纹公称 (Thread) | 行程 (mm) | A | B | C | D | E | F | H | I |
|------------|---------------|---------|-------|-------|-------|----|------|------|----|----|
| AC-2540 | M25×1.5 | 40 | 213 | 137 | 117 | 8 | 36 | 22 | 32 | 10 |
| AC-2550 | M25×1.5 | 50 | 240 | 170.5 | 100 | 8 | 19.5 | 22 | 32 | 10 |
| AC-2550-N | M25×1.5 | 50 | 240 | 170.5 | 100 | 8 | 19.5 | 22 | 32 | 10 |
| AC-2580 | M25×1.5 | 80 | 336.5 | 237 | 100 | 8 | 19.5 | 22 | 32 | 10 |
| AC-2580-N | M25×1.5 | 80 | 336.5 | 237 | 100 | 8 | 19.5 | 22 | 32 | 10 |
| AC-3325 | M33×1.5 | 25 | 143 | 103 | 74.5 | 10 | 15 | 27.8 | 41 | 10 |
| AC-3350 | M33×1.5 | 50 | 208 | 143 | 114.5 | 10 | 15 | 27.8 | 41 | 10 |
| AC-3660 | M36×1.5 | 60 | 248 | 162 | 134 | 10 | 26 | 35 | 46 | 10 |

■ 外形尺寸图 (mm)




| 型号 (MODEL) | 螺纹公称 (Thread) | 行程 (Stroke) (mm) | A | B | C | D | E | F | H | I |
|------------|---------------|------------------|-------|-------|-------|---|------|------|------|----|
| AD-1007 | M10×1.0 | 7 | 79 | 58 | 44 | 3 | 7 | 8.5 | 12.7 | 3 |
| AD-1007-N | M10×1.0 | 7 | 72 | 58 | 44 | 3 | - | - | 12.7 | 3 |
| AD-1210 | M12×1.0 | 10 | 78 | 61 | 46 | 3 | 7 | 8.5 | 14 | 4 |
| AD-1210-N | M12×1.0 | 10 | 71 | 61 | 46 | 3 | - | - | 14 | 4 |
| AD-1410 | M14×1.5 | 10 | 112.8 | 88.5 | 72.5 | 4 | 14.3 | 12 | 19 | 6 |
| AD-1410-N | M14×1.5 | 10 | 98.5 | 88.5 | 72.5 | 4 | - | - | 19 | 6 |
| AD-1612 | M16×1.5 | 12 | 117 | 90 | 76 | 4 | 15 | 13.5 | 19 | 6 |
| AD-1612-N | M16×1.5 | 12 | 102 | 90 | 76 | 4 | - | - | 19 | 6 |
| AD-2016 | M20×1.5 | 16 | 151 | 117 | 101 | 4 | 18 | 18 | 26 | 8 |
| AD-2016-N | M20×1.5 | 16 | 133 | 117 | 101 | 4 | - | - | 26 | 8 |
| AD-2020 | M20×1.5 | 20 | 136 | 98 | 75 | 6 | 18 | 18 | 26 | 8 |
| AD-2020-N | M20×1.5 | 20 | 124 | 98 | 75 | 6 | - | - | 26 | 8 |
| AD-2025 | M20×1.5 | 25 | 160 | 117 | 101 | 6 | 18 | 18 | 26 | 8 |
| AD-2025-N | M20×1.5 | 25 | 142 | 117 | 101 | 6 | - | - | 26 | 8 |
| AD-2525 | M25×1.5 | 25 | 163 | 118.5 | 101 | 8 | 19.5 | 22 | 32 | 10 |
| AD-2525-N | M25×1.5 | 25 | 143.5 | 118.5 | 101 | 8 | - | - | 32 | 10 |
| AD-2530 | M25×1.5 | 30 | 168 | 118.5 | 101 | 8 | 19.5 | 22 | 32 | 10 |
| AD-2530-N | M25×1.5 | 30 | 148.5 | 118.5 | 101 | 8 | - | - | 32 | 10 |
| AD-2725 | M27×1.5 | 25 | 153.8 | 110 | 90.2 | 8 | 18.8 | 23 | 36 | 10 |
| AD-2725-N | M27×1.5 | 25 | 138.8 | 110 | 90.2 | 8 | - | - | 36 | 10 |
| AD-2750 | M27×1.5 | 50 | 218.8 | 150 | 130.2 | 8 | 18.8 | 23 | 36 | 10 |
| AD-2750-N | M27×1.5 | 50 | 203.8 | 150 | 130.2 | 8 | - | - | 36 | 10 |

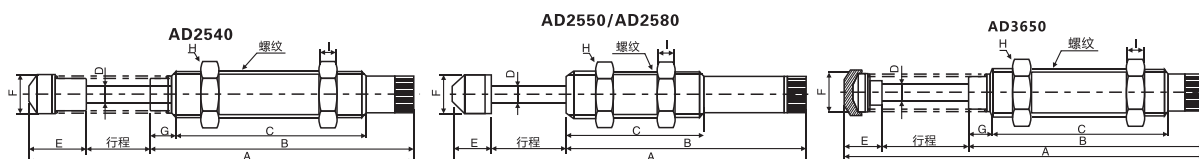


| 型号 (MODEL) | 螺纹公称 (Thread) | 行程 Stroke | A | B | C | D | E | F | G | H | I |
|------------|---------------|-----------|-------|-------|-----|----|------|------|----|----|----|
| AD-2540 | M25×1.5 | 40 | 220.5 | 144.5 | 117 | 8 | 36 | 22 | 10 | 32 | 10 |
| AD-2550 | M25×1.5 | 50 | 247.5 | 178 | 100 | 8 | 19.5 | 22 | - | 32 | 10 |
| AD-2580 | M25×1.5 | 80 | 344 | 244.5 | 100 | 8 | 19.5 | 22 | - | 32 | 10 |
| AD-3650 | M36×1.5 | 50 | 246.8 | 171 | 134 | 10 | 25.8 | 35.8 | 17 | 46 | 10 |

AD4225/AD4250/AD4275

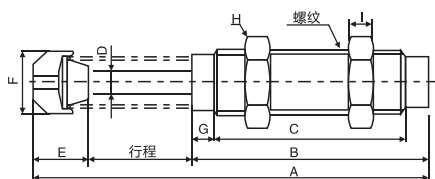

AD64050/AD64100/AD64150

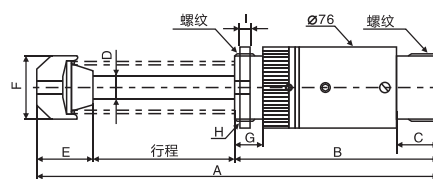

| 型号 (MODEL) | 螺纹公称 (Thread) | 行程 (Stroke) (mm) | A | B | C | D | E | F | G | H | I |
|------------|---------------|------------------|-------|-------|-------|----|------|------|------|------|-----|
| AD-4225 | M42×1.5 | 25 | 186.4 | 127.5 | 88 | 12 | 33.9 | 44.5 | 28.5 | 50 | 15 |
| AD-4250 | M42×1.5 | 50 | 240.9 | 157 | 117.5 | 12 | 33.9 | 44.5 | 28.5 | 50 | 15 |
| AD-4275 | M42×1.5 | 75 | 301.4 | 187.5 | 148 | 12 | 33.9 | 44.5 | 28.5 | 50 | 15 |
| AD-64050 | UNF21/2-12 | 50 | 247.8 | 146 | 26 | 20 | 51.8 | 59 | 23 | 76.2 | 9.4 |
| AD-64100 | UNF21/2-12 | 100 | 347.8 | 196 | 26 | 20 | 51.8 | 59 | 23 | 76.2 | 9.4 |
| AD-64150 | UNF21/2-12 | 150 | 467.8 | 256 | 26 | 20 | 61.8 | 59 | 23 | 76.2 | 9.4 |