


JetALL


捷特欧 4050数码喷墨机

JETALL 4050 DIGITAL INKJET PRINTER (DTG)

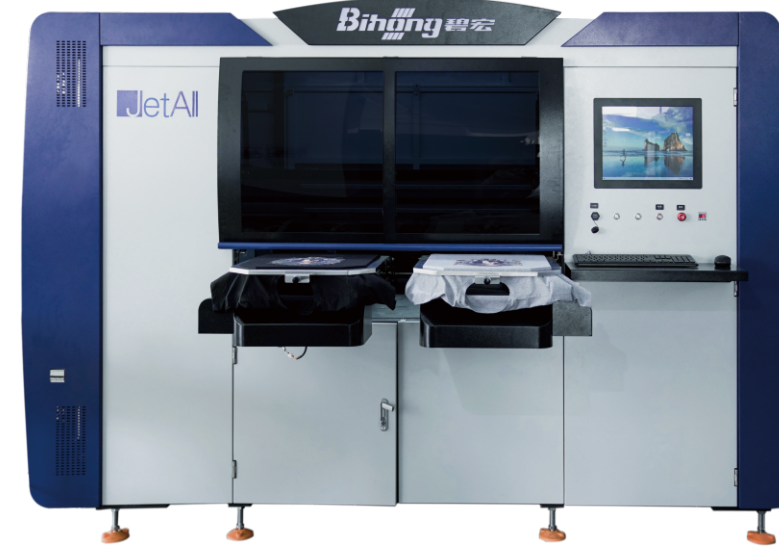

双工位工业级印花机

本机提供两款喷头
可供客户选择

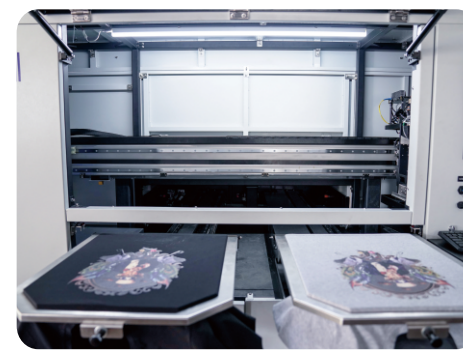

产品特点：

- 1、高性价比的爱普生I3200；
- 2、富士公司之星光喷头；
- 3、本机具有快速更换台板功能，可打印成人装、童装、衣袖、领口..... 使用上更加弹性。

Feature:

1. Cost-effective Epson I3200.
2. Fujifilm Dimatix Spectra Starfire SG1024.
3. The machine is with a typical function of fast change to pallet. You can print adult clothes, kid's clothes, sleeves and necklines and more with it which has made more flexible to multi purposes.


产品规格及技术参数 Product Specifications

设备型号 Model Name	BH-JA-E4050	BH-JA-S4050
喷头型号 Print Head	Fujifilm Dimatix Spectra Starfire SG1024或者Epson I3200	
最高精度 Max Resolutions	720x2400dpi	
最大印花尺寸 Max Print Area	400x500mm	
打印速度 Print Speed	约40pcs以上/h Around 40pcs/H and more	
墨水 Ink	纺织涂料墨水 W+CMKY	
电源 Power Supply	220V 50HZ 单相	
重量 Product Weight	1600KG	
机器尺寸 Physical Dimension	300x225x205cm	
RIP 软件 Software	RI print / Photo Print	

DailyJet+ 4060

多功能数码机

MULTI FUNCTION DIGITAL PRINTER

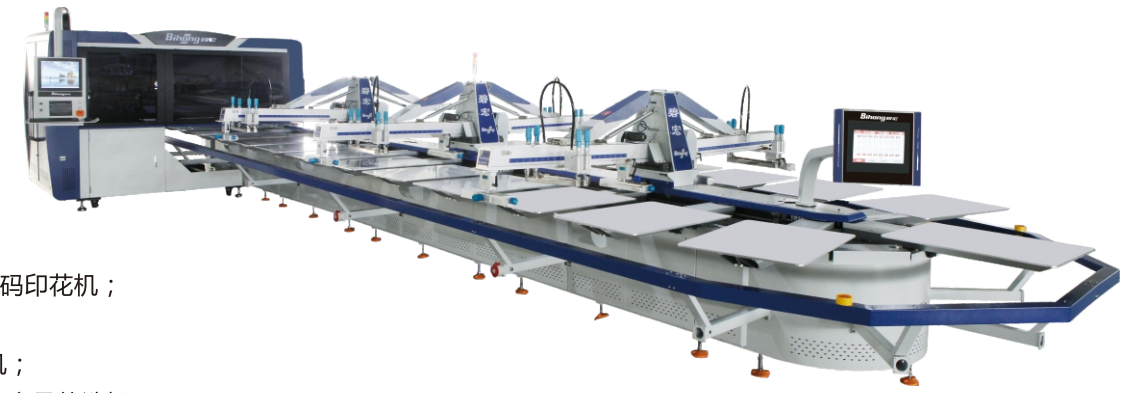

多功能印花机

- 1、单机可实现椭圆+数码印花机；
- 2、工业级喷头；
- 3、成衣数码直喷印花机；
- 4、打样开发，小批量生产最佳选择；
- 5、性价比高，节省空间，投资回报快。

Multi-Functions:

1. Standalone Auto Oval hybrid digital screen printing.
2. Industrial print-head.
3. Direct to garment printer (DTG).
4. Small batch production, pre-production and sample development machine.
5. Cost effective, space effective, quick result oriented machine.

何必迁就跑台机
椭圆的更好

DailyJet+ 4060 使用工业级喷头结合椭圆手工丝印打底+数码彩色的优势，让您从此远离跑台机对位不准的困扰。
DailyJet+ 4060: Perfect solution-combination of oval screen printing and printhead digital printing, keeps the trouble of misregistration of running station easy-clogging away.

数码机部分主要参数 The Main Parameter of Digital Printing Machine

喷头技术	Print Heads	工业级喷头星光SG1024(Industrial Printing Heads Starfire SG1024)
颜色	Color	4色 (CMYK 4color OR W+CMYK 5color)
印花分辨率	The Printing Resolution	720x800dpi、720x1000dpi、720x1200dpi
印花面料	Fabric Types	棉/麻/丝/尼龙/涤纶/羊毛/羊绒(Cotton, hemp, silk, nylon, polyester, wool and cashmere)
打印高度	Printing Height	3-30mm
最大印花尺寸	Max Printing Size	400x600mm
墨水种类	Ink Type	纺织涂料墨水 (Pigment)
介质最大厚度	Thickness of Printed Fabric	25mm
供墨系统	Ink System	自动负压供墨系统 (Automatic negative pressure ink system)
RIP软件	Rip.software	PhotoPrint专用印染软件/ 可选配Neostampa(Optional)
喷头维护	Printing Head Maintenance	自动清洗 (Auto Self-cleaning) 自动保湿 (Auto Self-moisturizing) 自动刮墨系统 (Auto ink-scraping system)
电源	Power Supply	220VAC、单相电源(One Phase)、50/60HZ
工作环境	Work Environment	温度25-28°C(Temperature)、湿度55%-65%(Humidity)

广东碧宏机械股份有限公司
Guangdong ACES Machinery Co., Ltd.

地址：广州市南沙区大岗镇北龙路83号五号厂房
Add: Add: No. 83, Building 5th, Beilong Road, Dagang Town, Nansha District, Guangzhou, China
Tel: 020-8498 9616 8498 9619
E-mail: sales1@bhprinter.com E-mail: sales6@bhprinter.com



涂料数码与丝网印花

全方位更佳方案提供者

A Comprehensive and Better Solution Provider for
Digital & Screen Printing Equipments


广东碧宏机械股份有限公司
Guangdong ACES Machinery Co., Ltd.

广州碧宏印刷设备有限公司 | 越南碧宏印刷设备公司
Guangzhou Bihong Printing Equipment Co., Ltd. | Vietnam Bihong Printing Machinery Co., Ltd.

EZJet

好易达涂料卷式数码转印机 EZ Jet E32260-R

ROLL TYPE PIGMENT DIGITAL TRANSFER PRINTER EZ JET E32260-R

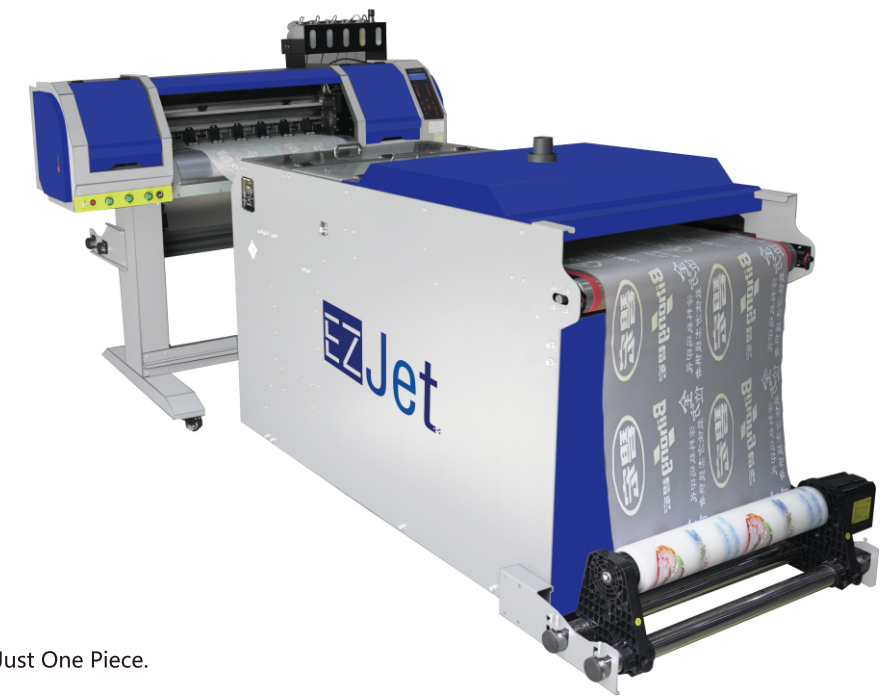

产品特点：

- 1、各种面料皆能印；
- 2、手感柔软；
- 3、设备投资低，使用空间小；
- 4、操作简单，无环境污染；
- 5、适合个性化定制，一件起订；
- 6、色彩鲜艳，分辨率高；
- 7、洗水牢度佳。

Feature:


1. Applicable to Various Fabrics.
2. Softner Touch.
3. Minimized Investment and Small footprint.
4. Easy Operation and Environmental Friendly.
5. Can be Customized and Start Printing From Just One Piece.
6. Vivid Color with High Resolution.
7. High Fastness to Washing.

产品规格及技术参数 Product Specifications

数码打印机 Digital Printer	
型号 Model	EZJet
喷头 Print Head	爱普生压电式 I3200x2 Epson I3200x2
最高精度 Max. Resolution	720x2400dpi
生产速度 Production Speed	6pass 9m ² /h 8pass 6m ² /h
PET膜尺寸 PET Film Size	600mmx100M
墨水 Ink	纺织涂料墨水W+CMYK Textile Pigment Ink W+CMYK
电源 Power Supply	50HZ/60HZ/110V/220V
印花宽度 Printing Width	最大600mm Max 600mm
重量 Weight	250KG
机器尺寸 Machine Size (LxWxH)	1600x960x1550mm

涂料转印料粉烘干机 Pigment Transfer Powder Shaking Dryer

电压 Voltage	220V
电流 Current	20A
额定功率 Rated Power	3.42w
耗能 Energy Consumption	1kw-2.5kw
烘干温度 Drying Temperature	140-150°C
烘干速度 Drying Speed	依打印速度自动调节 Automatic adjustment according to printing speed
重量 Weight	250KG
机器尺寸 Machine Size (LxWxH)	1600x900x1160mm

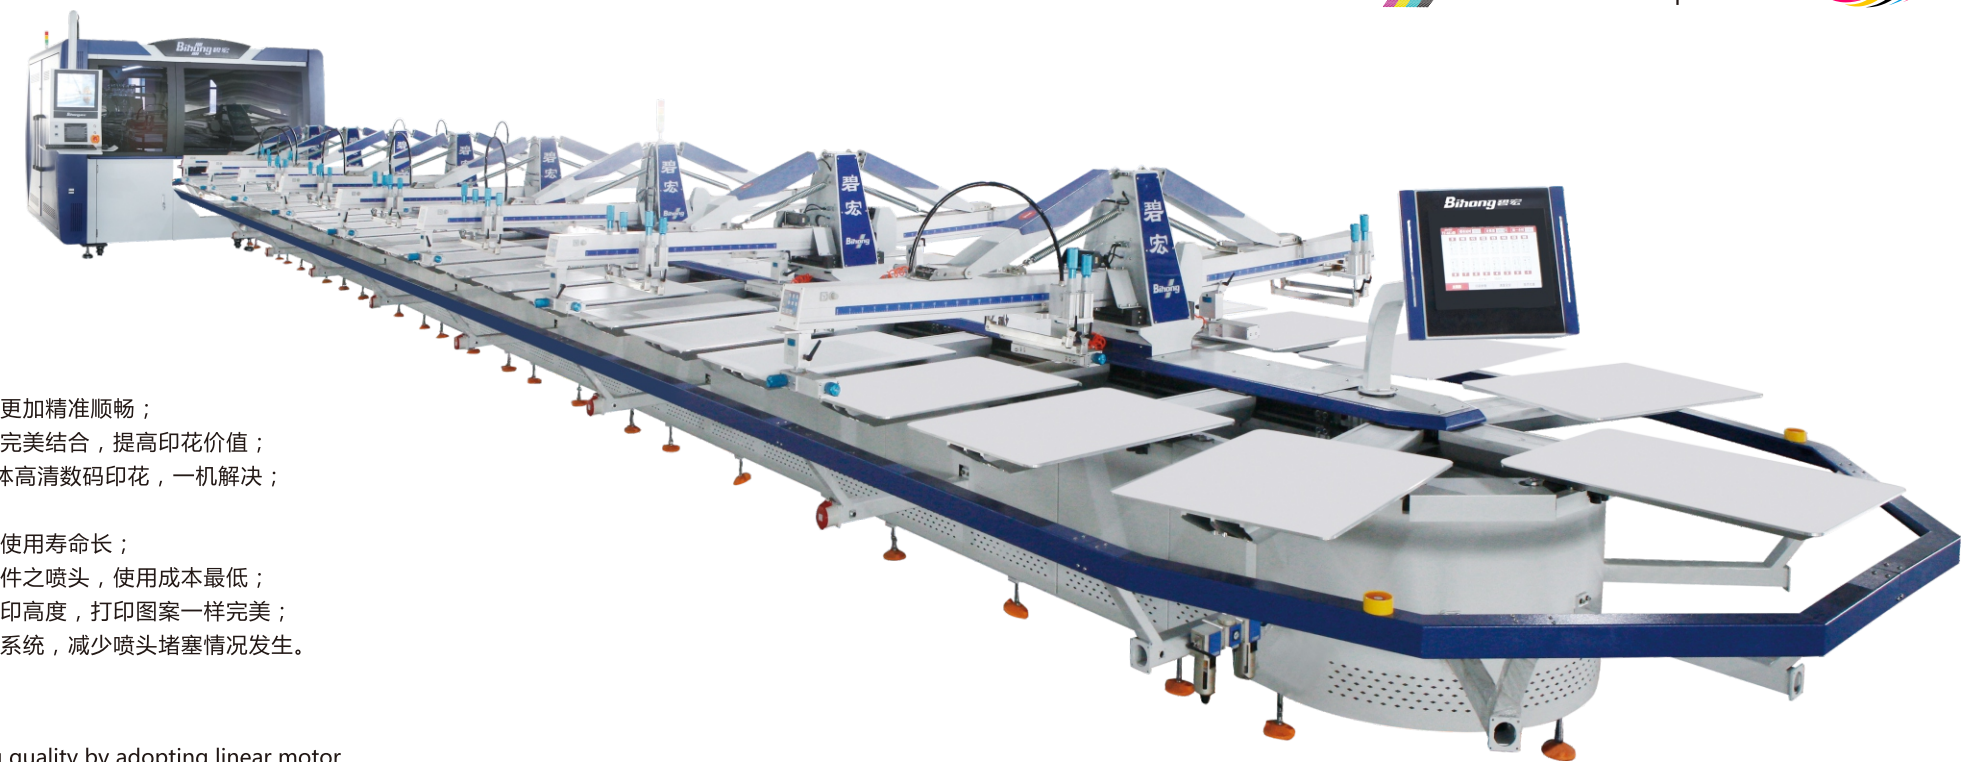

产品特点：

1. 采用直线电机，打印更加精准顺畅；
2. 数码喷印与传统丝网印完美结合，提高印花价值；
3. 多工艺丝网印刷+立体高清数码印花，一机解决；
4. 低成本，高效率；
5. 工业级全金属喷头，使用寿命长；
6. 唯一可维修可更换零件之喷头，使用成本最低；
7. 超强喷射力，提高打印高度，打印图案一样完美；
8. 唯一喷头自带内循环系统，减少喷头堵塞情况发生。

Feature:

- 1.Ensure better printing quality by adopting linear motor.
- 2.Improve printing effect by perfect solution-combining screen printing and digital printing system.
- 3.Multi printing crafts+high resolution digital printing in one machine.
- 4.Low cost, high efficiency.
- 5.The industrial-grade all-metal printing head(inside and outside are all metal and genuine), longer lifetime.
- 6.Repairable print head with using lowest cost.
- 7.Super jet power, if the printing head is slightly higher than a specified height requirement,the print effect is still perfect.
- 8.The printing head with internal circulation system can reduce the printing head blockage.

数码机部分主要参数 The Main Parameter of Digital Printing Machine

喷头技术	Print Heads	工业级喷头星光SG1024(Industrial Printing Heads Starfire SG1024)
颜色	Color	4~6色 (4or6 colors)
印花分辨率	The Printing Resolution	600x800dpi、600x1000dpi、600x1200dpi
最高印花分辨率	Max. Printing Resolution	720x1200dpi
印花面料	Fabric Types	棉/麻/丝/尼龙/涤纶/羊毛/羊绒(Cotton, hemp, silk, nylon, polyester, wool and cashmere)
打印高度	Printing Height	3-30mm
最大印花尺寸	Max Printing Size	650x750mm
墨水种类	Ink Type	纺织涂料墨水 (Pigment)
介质最大厚度	Thickness of Printed Fabric	25mm
供墨系统	Ink System	自动负压供墨系统 (Automatic negative pressure ink system)
墨水容量	Ink Capacity	5L
RIP软件	Rip.software	PhotoPrint专用印染软件/ 可选配Neostampa(Option)
喷头维护	Printing Head Maintenance	自动清洗 (Self-cleaning) 自动保湿 (Self-moisturizing) 自动刮墨系统 (Auto ink-scrapping system)
电源	Power Supply	220VAC、单相电源(One Phase)、50/60HZ
工作环境	Work Environment	温度25-28°C(Temperature)、湿度55%-65%(Humidity)
速度	Production Capacity	A4 350pcs/h A3 280pcs/h

椭圆机主要技术参数 Main Technical Parameter of Oval Printing Machine

型号	Type	BH-ID6s	BH-ID8s	BH-ID10s	BH-ID12s	BH-ID14s	BH-ID16s	BH-ID18s	BH-ID20s
印刷颜色	Printing Color Number	6colors	8colors	10colors	12colors	14colors	16colors	18colors	20colors
台板数目	Pallet Number	30pcs	36pcs	42pcs	48pcs	54pcs	60pcs	66pcs	72pcs
最大台板面积	Max. Pallet Size			S	630x865mm	L1	700x1050mm		
最大印花面积	Max. Printing Area (lkw)			S	580x700mm	L1	650x900mm		
最大网框面积	Max. Screen Frame Size			S	700x1000mm	L1	800x1180mm		
机器长度	Machine Length	1205cm	1425cm	1645cm	1865cm	2085cm	2305cm	2525cm	2745cm
机器宽度	Machine Width			S	470cm	L1	500cm		
机器高度	Machine Height			S	219cm	L1	219cm		
机器重量	Machine Weight	5450kgs	6330kgs	7210kgs	8090kgs	8970kgs	9850kgs	10730kgs	11610kgs
套色精度	Printing Accuracy	±0.02mm							
气压规格	Air Pressure Specification	0.6MPa/0.8MPa (After drying and filtering can be used)							
印头驱动	Print Head Power Driver	400W(every printing head servo motor)							
总耗电量	Total Power Consumption	3.9kw	4.7kw	5.5kw	6.8kw	7.4kw	8.2kw	9kw	9.8kw
烘箱最大功率	Each Oven Max. Power	15.6kw							
供电参数	Power Supply Parameters	Three phase 380V,50Hz							
椭圆+数码产能	Oval + Digital Production Capacity	350pcs/hour							



产品特点：

1. 全钢架底座，稳定坚固耐用；
2. 全自动印刷，带有快速烘干系统；
3. 只需2~3人操作即可；
4. 每个颜色可单独打印；
5. 可自动调节印刷高度；
6. 定位机构设计合理，套位精准。

Feature：

- 1.Steel frame base,more durable and stronger.
- 2.Full automatic printing with flash dryer.
- 3.Only need 2-3 people to operate.
- 4.Each color can be printed individually.
- 5.Can adjust the printing height automatically.
- 6.Proper positioning mechanism design, high registration.

适用范围：

适合于水浆、油性墨、热固油墨、胶浆等各种印工艺，植绒作为其标准功能配置，是裁片及各种成衣印花、植绒加工的最佳利器。

本机于适用服装，T恤，箱包，鞋材，袜子，衣帽，无纺布，布料，PVC板，纸，皮革，不干胶等材料的印刷烘干。

Usage：

Being suitable for water slurry, oily ink, plastisol ink, mucilage printing craft, etc. As a standard function configuration, flocking is the best weapon of cutting piece, all kinds of garment printing and flocking processing.

The machine can be used in garment, t-shirt, bag, sock, hat, fabric, paper, leather, PVC board, sticker and so on.

产品优势：

1. 套位精度高：技术先进，成熟稳定，机器套位精度误差在±0.02毫米之间，有效提高印刷产品的优良率，提升印花品质；
2. 适合多种印花工艺：采用印头—烘箱—冷却的排列方式，各种浆料均可生产，特别适合水浆、胶浆、油墨、厚版、拔印、发泡等多种印花工艺；
3. 可定制颜色数：可根据客户需要，定制6种~24种颜色的自动印花机；
4. 牢固的印刷效果：每个颜色对应有一个烤箱，大大提高了生产效率，增加了印刷的牢固度；
5. 效率产能高：一机可印多色胶浆，也可一机当多条生产线用；只需3人操作即可生产，节省人工，提高效率，大大替代了传统的跑台人工丝印；
6. 操作更方便：网框固定方式独特，擦网不取网，确保套位精度稳定性；冷却工位有效降低水性胶浆塞网情况；
7. 不受网框限制：大小网框均可通用，公司原先机用网框或者手印网框均可使用；大裁片，成衣印花不受限制；
8. 印刷稳定长寿：本机型台板传输独特，采用无链条传动结构，增加设备的稳定性及延长设备寿命；
9. 环保低能耗：本印花机是同等印花机耗气量的1/2；低耗能可旋转移动烤箱，适合大小印刷面积。

Product Advantage:

- 1.High precision: Registration tolerance is ±0.02mm with advanced, mature and stable technology, which improves the printing effects greatly.
- 2.Being suitable for various printing crafts by using the print head, oven and cooling arrangement and can produce all kinds of slurry, especially suitable for the water slurry, mucilage, printing ink, thick version, discharging printing, foaming, etc.
- 3.Printing color number can be customized from 6 to 24 color as per customer's need.
- 4.Firm printing effect – each color has its corresponding oven, improving the production efficiency and increase the fastness of printing greatly.
- 5.High efficiency and capacity –one machine not only can print multi color pattern, but also be used as several production lines; Only needs 2-3 people to operate, save the manpower and improve efficiency greatly to replace the traditional manual screen printing.
- 6.More convenient operation—the unique fixed form of screen frame which don't need to take down the frame to clean it, to ensure the stability of registration, and also, cooling the pallet can prevent the screen from plugging.
- 7.Without being limited by the screen frame size—small or big size both are available; large cutting piece or ready-made garment both apply to being printed.
- 8.Stable printing and long lifetime—the unique transport of pallet with chainless transport structure, increase the stability and extend the lifetime of the equipment.
- 9.Eco-friendly and low energy consumption—the machine only needs half the gas consumption of other same kind machine; rotary mobile oven with low power, suitable for various printing size.



主要技术参数 Main Technical Parameter of Oval Printing Machine

型号	Type	BH-I6s	BH-I8s	BH-I10s	BH-I12s	BH-I14s	BH-I16s	BH-I18s	BH-I20s
印色数目	Printing Color Number	6colors	8colors	10colors	12colors	14colors	16colors	18colors	20colors
台板数目	Pallet Number	24pcs	30pcs	36pcs	42pcs	48pcs	54pcs	60pcs	66pcs
最大台板面积	Max. Pallet Size			S	630x865mm	L1	700x1050mm	L2	850x1200mm
最大印花面积	Max. Printing Area (lkw)			S	580x700mm	L1	650x900mm	L2	800x1000mm
最大网框面积	Max. Screen Frame Dimension			S	700x1000mm	L1	800x1180mm	L2	900x1280mm
机器长度(S)	Machine Length(s)	982cm	1205cm	1420cm	1650cm	1880cm	2100cm	2320cm	2550cm
机器宽度	Machine Width			S	350cm	L1	380cm	L2	420cm
机器高度	Machine Height			S	160cm	L1	180cm	L2	186cm
机器重量	Machine Weight	3300kgs	4180kgs	5060kgs	5940kgs	6820kgs	7700kgs	8580kgs	9460kgs
套色精度	Printing Accuracy	±0.02mm							
气压规格	Air Pressure Specification	0.6MPa/0.8MPa (After drying and filtering can be used)							
印头驱动	Print Head Power Driver	400W(every printing head servo motor)							
总耗电量(不含烘箱)	Total Power Consumption(without Dryer)	3.9kw	4.7kw	6kw	6.8kw	7.6kw	8.9kw	9.7kw	10.5kw
烘箱最大功率	Each Oven Max. Power	15.6kw							
供电参数	Power Supply Parameters	Three phase 380V,50Hz							
产能	Production Capacity	600pcs/hour							