


**MODEL: 12N6.5-3B**

**NO.: 301020002-00004**

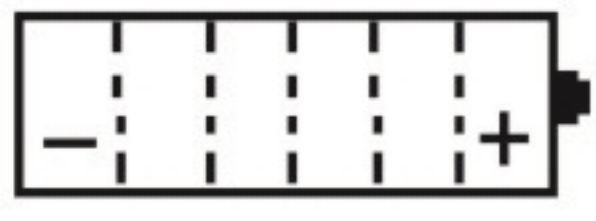


Container Color

- Cover:Black C
- Bottom:White C

**Plane Chart:**

Unit:mm Terminal type:G1

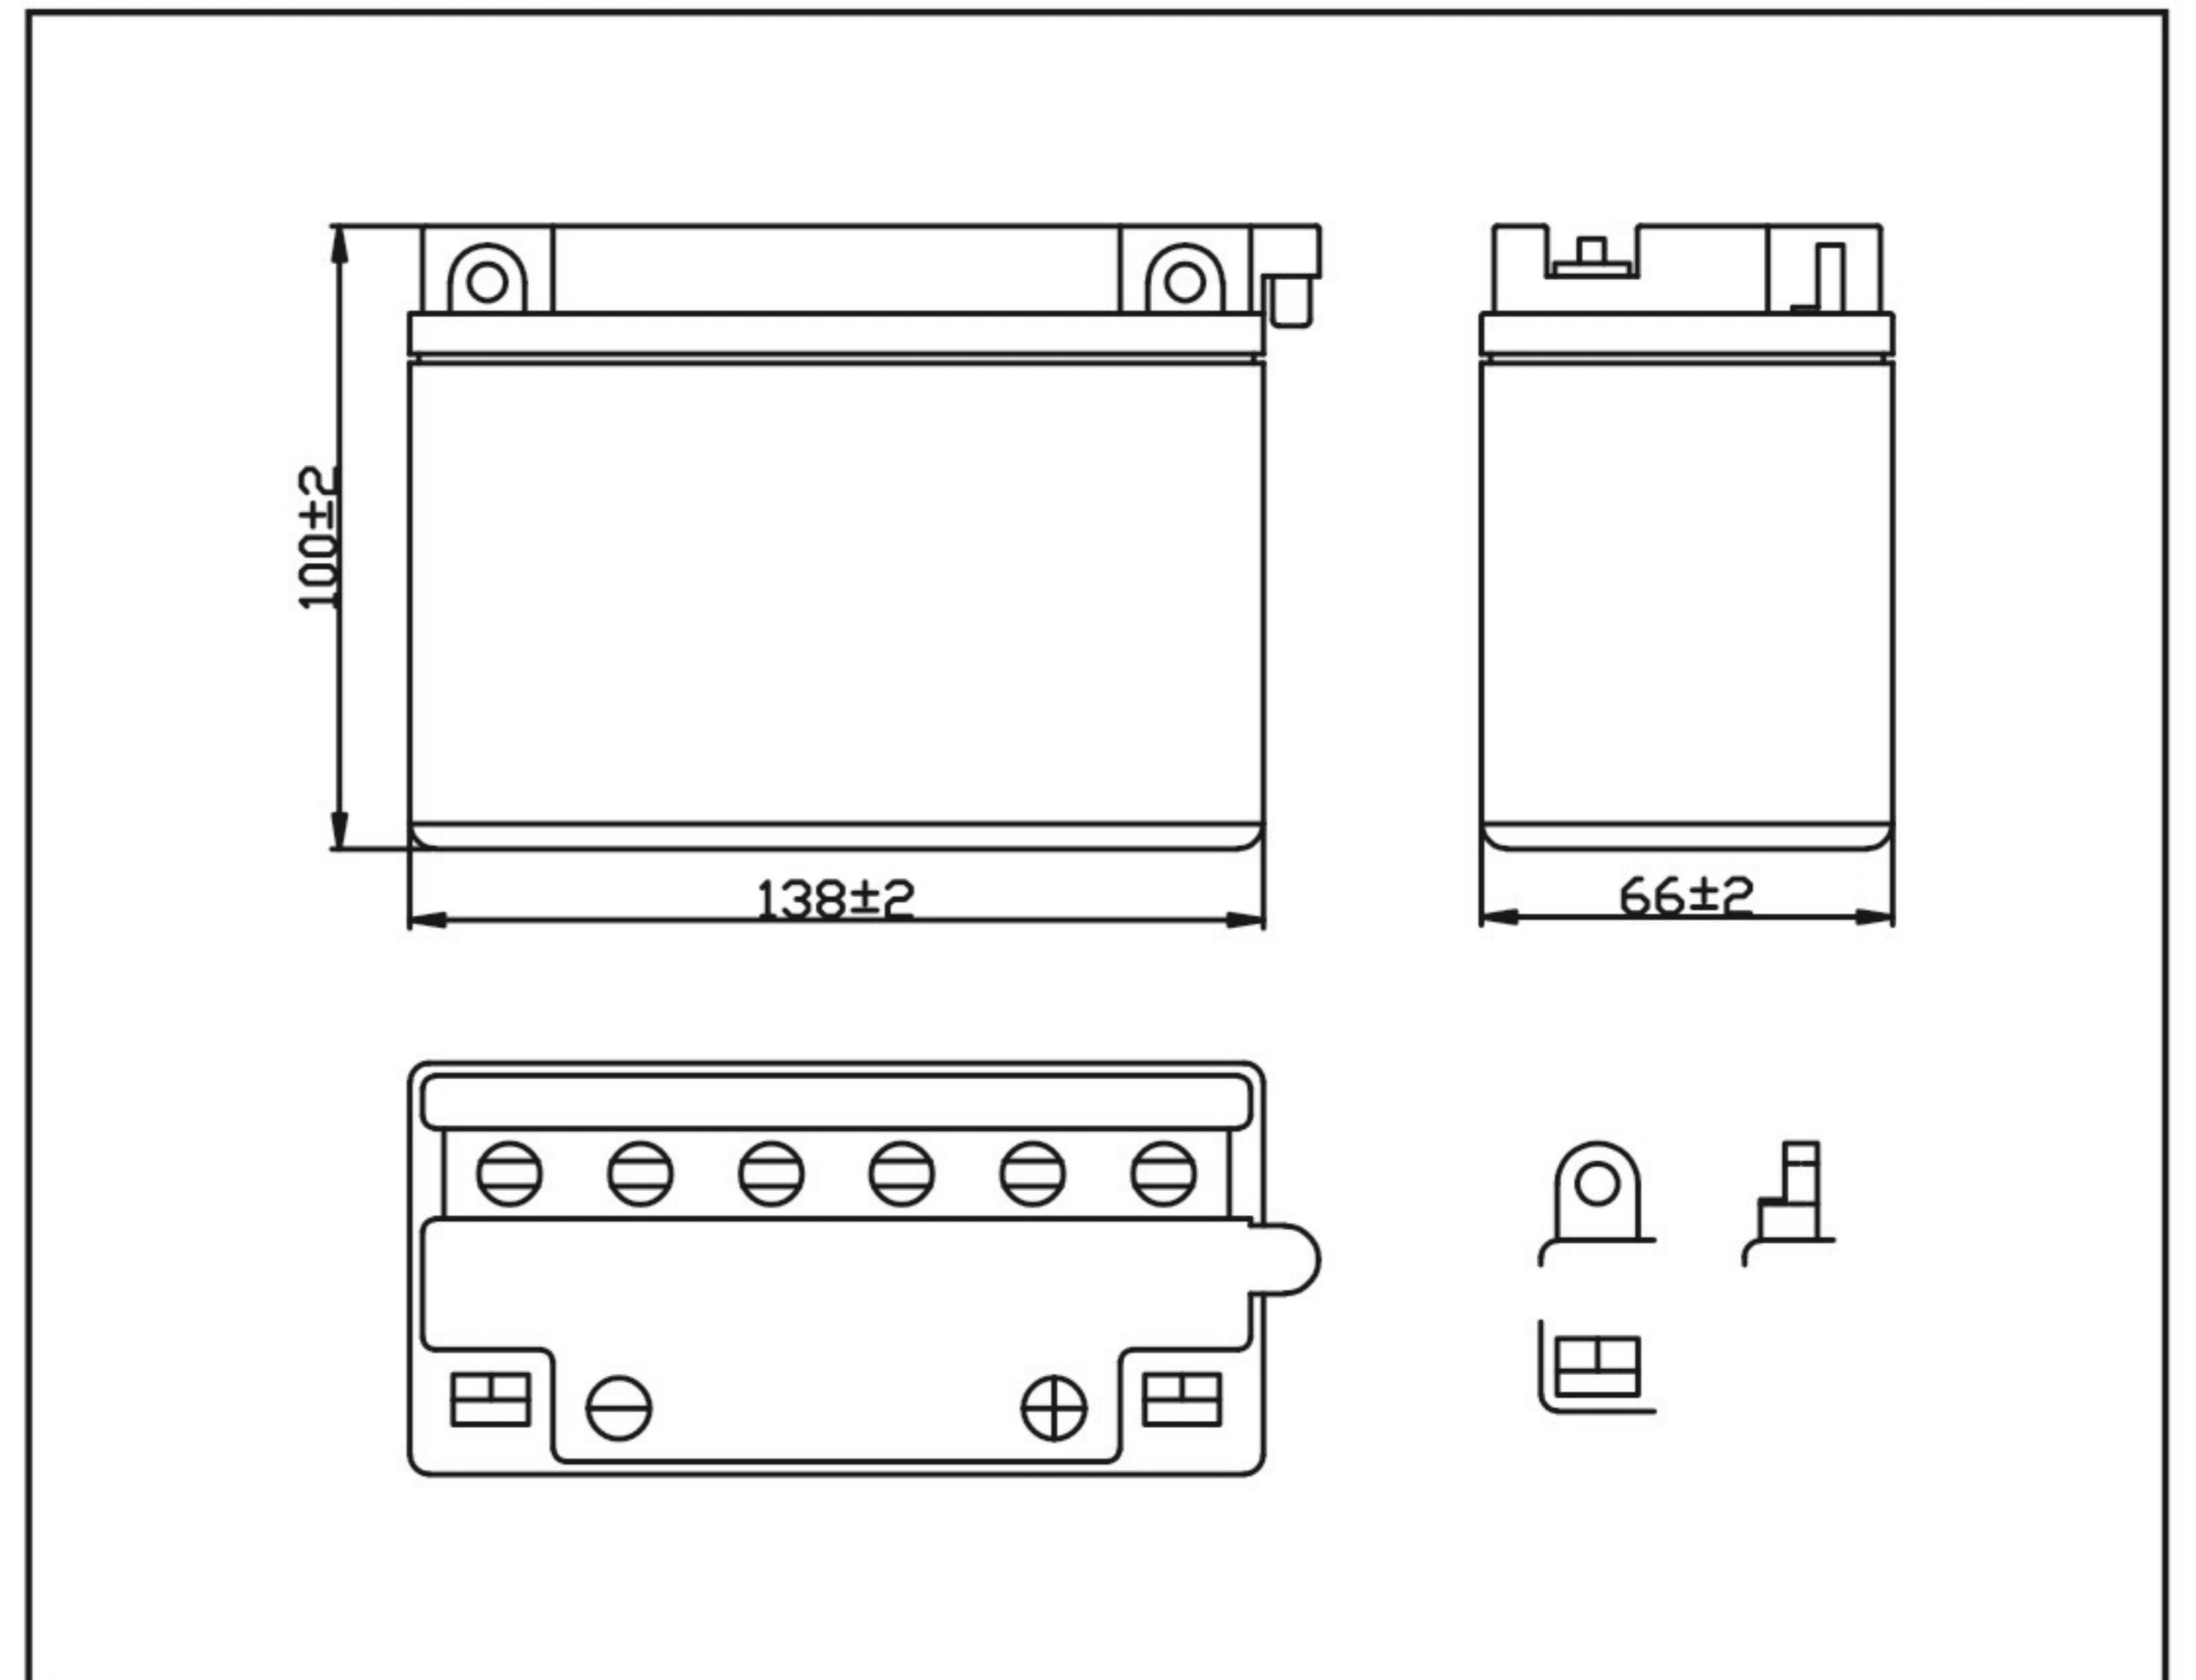

**Parts:**


Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Explosion Plate	Way of Sealing
PP	PP	Pb	PbO <sub>2</sub>	Pb	PE/Compound Fibre	dilute sulphuric acid	Rubber	PP	Heat Sealing


**Parameter Chart:**

Volts	12V		
Capacity (25°C)	10 hours rate		6.5Ah
Appx.Dimension (mm)	L±2		138
	W±2		66
	H±2		100
Storage Status	Dry		
Weight (Approx)	1.55Kg	Weight w/ Acid	0.62Kg
	<b>Retention of Charge Storage @25 °C</b>		
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:14.4V Limit Current:1.3A Charging Hours:2-3H	
12 month	40%	Constant Volts:14.4V Limit Current:1.3A Charging Hours:4-6H	
<b>CCA</b>	<b>Factory Standard (-10°C)</b>	<b>Factory Standard (-18°C)</b>	
Discharging Current	50A	55A	

**Discharge Current 25°C**

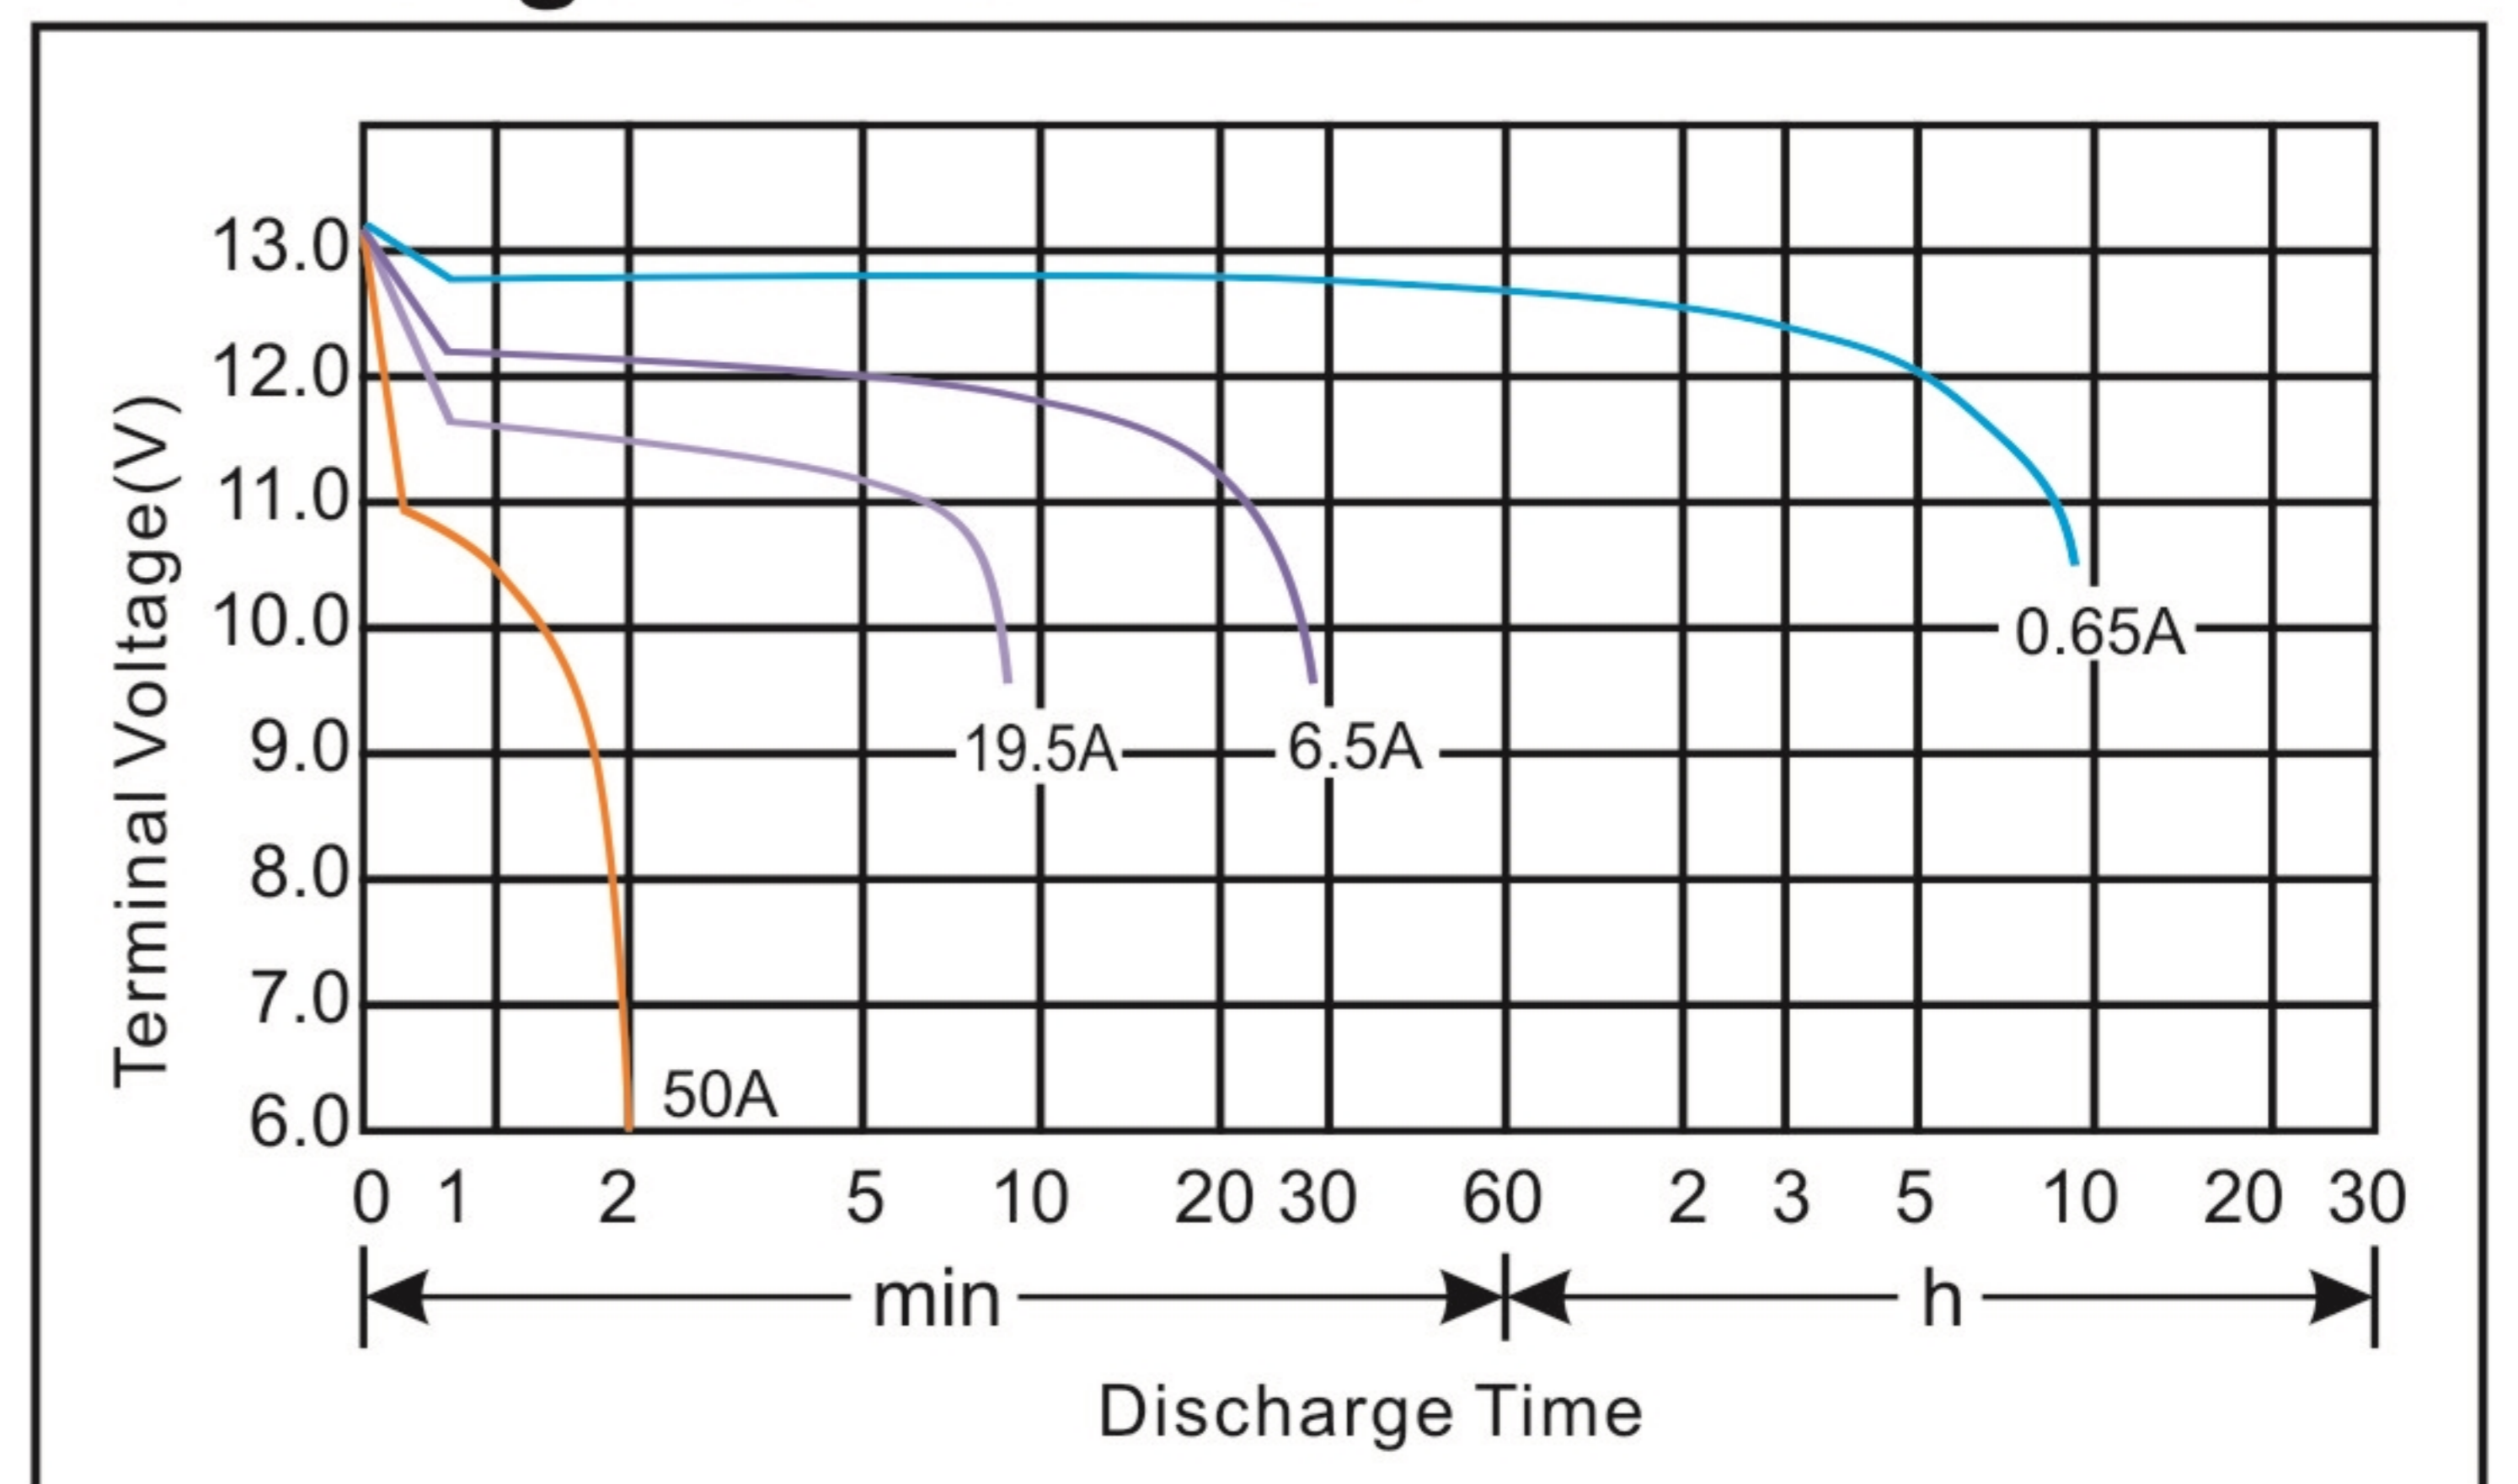

**Residual Capacity**

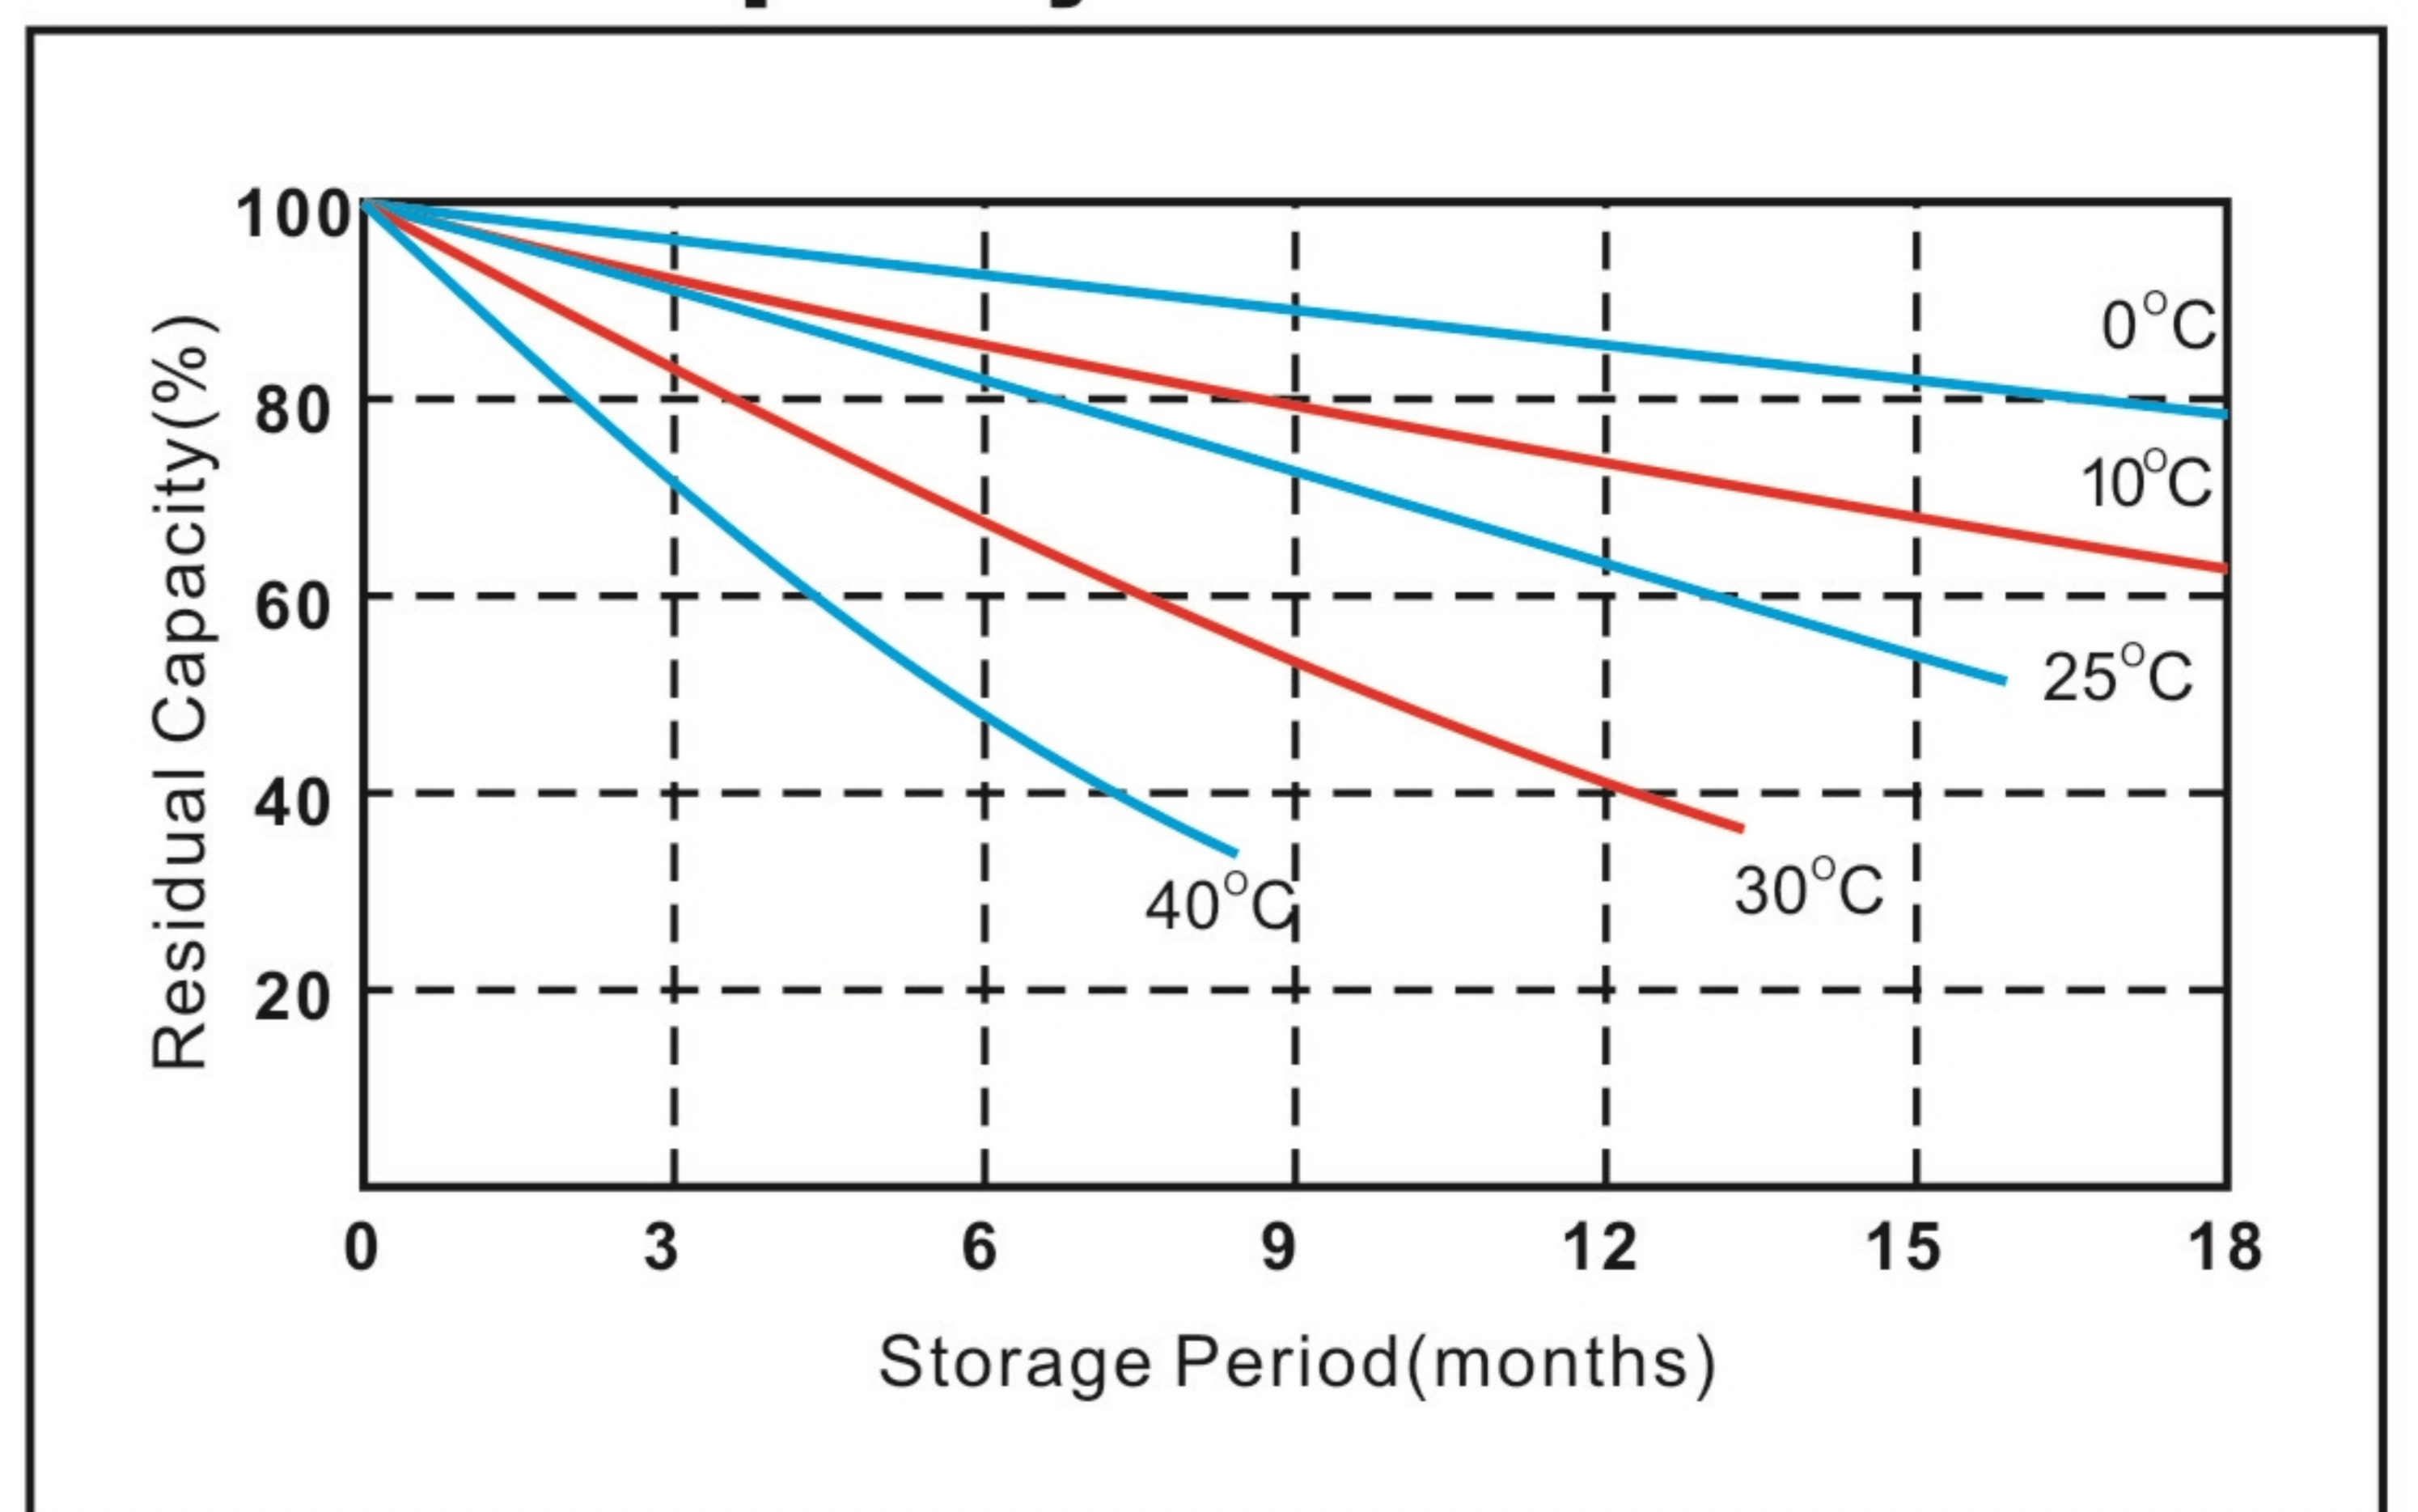

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.