





DIP SERIES

Piano Type Dip Switch

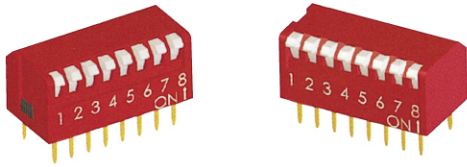

HOW TO ORDER

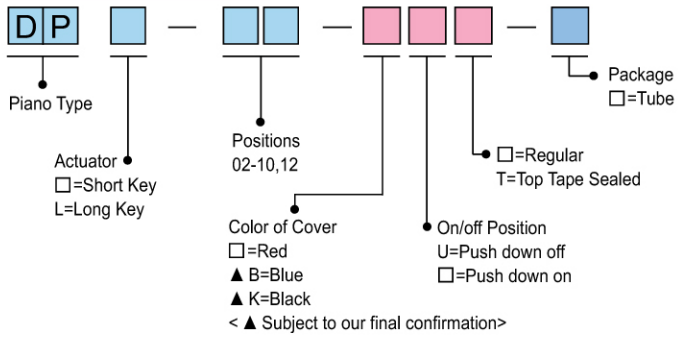

◆ Features

- Piano type & side push
- Red, blue and black color available
- Gold contact for high reliability
- Short key or long key type

◆ Applications

- Industrial control
- Computers and peripherals
- Multiple control functions

◆ SPECIFICATION

Items	Standard	
Environmental	Operation Temperature Range	-20°C to +70°C
	Storage Temperature Range	-40°C to +85°C
Electrical performance	Electrical Life	2,000 operations
	Non-Switching Rating	100mA, 50VDC
	Switching Rating	25mA, 24VDC
Mechanical performance	Operating force	400gf max.
	Stroke	2.0mm

Package

DP(L)-02:70pcs/tube	DP(L)-02-T:75pcs/tube
DP(L)-03:50pcs/tube	DP(L)-03-T:49pcs/tube
DP(L)-04:39pcs/tube	DP(L)-04-T:39pcs/tube
DP(L)-05:32pcs/tube	DP(L)-05-T:32pcs/tube
DP(L)-06:27pcs/tube	DP(L)-06-T:27pcs/tube
DP(L)-07:24pcs/tube	DP(L)-07-T:24pcs/tube
DP(L)-08:21pcs/tube	DP(L)-08-T:21pcs/tube
DP(L)-09:19pcs/tube	DP(L)-09-T:19pcs/tube
DP(L)-10:17pcs/tube	DP(L)-10-T:17pcs/tube
DP(L)-12:14pcs/tube	DP(L)-12-T:14pcs/tube

◆ DIAGRAM

No.	Dimensions	Circuit Diagram			
		Pad Layout			
1	● DP 	DP-12	12	31.84[1.254]	27.94[1.100]
		DPL-12	12	31.84[1.254]	27.94[1.100]
		DP-10	10	26.76[1.054]	22.86[.900]
		DPL-10	10	26.76[1.054]	22.86[.900]
		DP-09	9	24.22[.954]	20.32[.800]
		DPL-09	9	24.22[.954]	20.32[.800]
		DP-08	8	21.68[.854]	17.78[.700]
		DPL-08	8	21.68[.854]	17.78[.700]
		DP-07	7	19.14[.754]	15.24[.600]
		DPL-07	7	19.14[.754]	15.24[.600]
		DP-06	6	16.60[.654]	12.70[.500]
		DPL-06	6	16.60[.654]	12.70[.500]
		DP-05	5	14.06[.554]	10.16[.400]
		DPL-05	5	14.06[.554]	10.16[.400]
DP-04	4	11.52[.454]	7.62[.300]		
DPL-04	4	11.52[.454]	7.62[.300]		
DP-03	3	8.98[.354]	5.08[.200]		
DPL-03	3	8.98[.354]	5.08[.200]		
DP-02	2	6.44[.261]	2.54[.100]		
DPL-02	2	6.44[.261]	2.54[.100]		
PROD.NO.	NO.OF POS.	DIM.A	DIM.B		
SCHEMATIC(TYP.)					