




E SERIES

6.2x6.2 Through Hole Terminals Type Tact Switch

TACT SWITCH



HOW TO ORDER

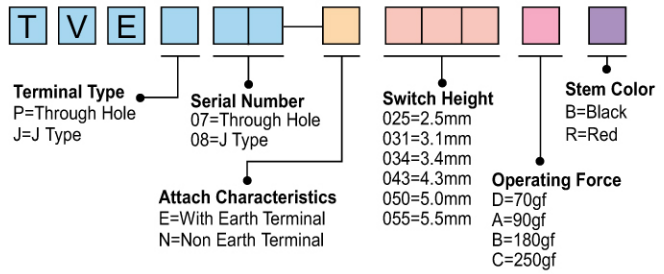

◆ FEATURES

- Dustproof sealed structure
- 6x6mm snap-in type
- Ground pin available
-

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	A=1,000,000Cycles B=1,000,000Cycles C=500,000Cycles
Mechanical performance	Operating force	A:90gf B:180gf C:250gf
	Travel	0.25 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram				
		PCB Layout				
1	<p>● TVEP07</p> <table border="1"> <tr><td>H</td></tr> <tr><td>3.4</td></tr> <tr><td>3.1</td></tr> <tr><td>2.5</td></tr> </table>	H	3.4	3.1	2.5	
H						
3.4						
3.1						
2.5						
2	<p>● TVEJ08</p> <table border="1"> <tr><td>H</td></tr> <tr><td>3.4</td></tr> <tr><td>3.1</td></tr> <tr><td>2.5</td></tr> </table>	H	3.4	3.1	2.5	
H						
3.4						
3.1						
2.5						