





J SERIES

10.0x10.0 Washable Tact Switch

TACT SWITCH

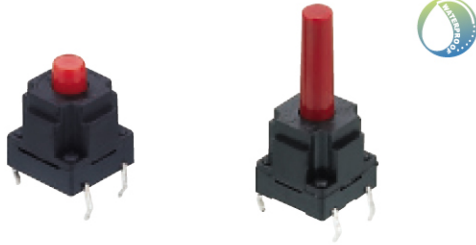

HOW TO ORDER

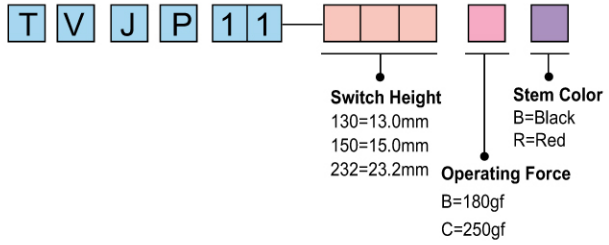

◆ FEATURES

- Waterproof sealed structure
- 10x10mm snap-in type
- Partial output terminal can be used as jumper pin

◆ APPLICATIONS

- Major home appliances
- Distribution boards
- Storage batteries
- Office equipment

◆ SPECIFICATION

Items		Standard
Operating temperature range		-40℃ to +90℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	500mΩ max.
Durability	Lifetime	B:C=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.30 ± 0.1mm

◆ WATER RESISTING PERFORMANCE

Temperature of water	60℃
Depth of water	10cm
Immersion duration	240h

◆ DIAGRAM

No.	Dimensions	Circuit Diagram								
		PCB Layout								
1	<p>● TVJP11</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>H</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>13</td> <td>3.8</td> </tr> <tr> <td>15</td> <td>3.5</td> </tr> <tr> <td>23.2</td> <td>3.5</td> </tr> </tbody> </table>	H	A	13	3.8	15	3.5	23.2	3.5	
H	A									
13	3.8									
15	3.5									
23.2	3.5									