





Type : EPC Cores

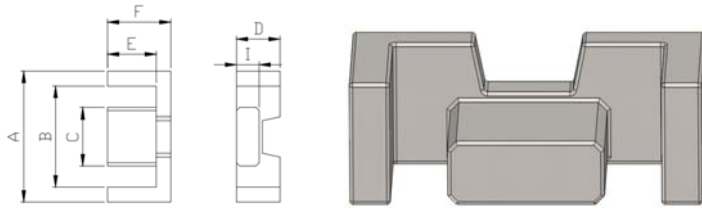

规格 Type	尺寸Dimensions (mm)							图号 Fig.
	A	B	C	D	E	F	I	
EPC-12.00-3.50-7.70	12.00±0.20	9.40±0.2±0.15	3.20±0.10	3.50±0.15	6.30±0.15	7.70±0.15	1.50±0.10	1
EPC-12.20-3.40-7.60	12.2±0.25	9.80±0.25	3.30±0.15	3.40±0.15	6.30±0.20±0.10	7.60±0.20	1.90±0.15	1
EPC-12.75-3.30-6.85	12.75±0.25	9.00MIN	6.00±0.20	3.30±0.15	4.55±0.15	6.85±0.15	1.85±0.15	1
EPC-15.00-4.65-7.70	15.00±0.40	11.00±0.36	5.20±0.15	4.65±0.20	5.70±0.25	7.70±0.15	2.40±0.15	1
EPC-15.20-4.00-7.00	15.20±0.30	10.10MIN	4.30±0.2	4.00±0.20	4.80±0.20	7.00±0.20	2.70±0.15	1
EPC-15.90-4.20-7.55	15.9±0.30	12.70±0.30	6.40±0.20	4.20±0.20	5.25±0.15	7.55±0.15	2.05±0.15	1
EPC-20.00-6.65-10.00	20.00±0.55	15.40±0.50	8.90±0.15	6.65±0.20	7.70±0.25	10.00±0.15	3.60±0.15	1

规格 Type	磁芯参数				单重 (g/set)	图号 Fig.
	C1 (mm)	Le (mm)	Ae (mm ²)	Ve (mm ³)		
EPC-12.00-3.50-7.70	0.200	6.200	31.700	196.790	1.50	1
EPC-12.20-3.40-7.60	4.760	35.200	7.400	260.480	1.50	1
EPC-12.75-3.30-6.85	2.280	27.300	12.000	327.600	1.90	1
EPC-15.00-4.65-7.70	2.280	33.700	14.800	498.760	2.90	1
EPC-15.20-4.00-7.00	2.390	28.200	11.800	332.760	2.90	1
EPC-15.90-4.20-7.55	2.420	34.300	14.200	487.060	2.70	1
EPC-20.00-6.65-10.00	1.520	47.000	31.000	1457.000	7.20	1

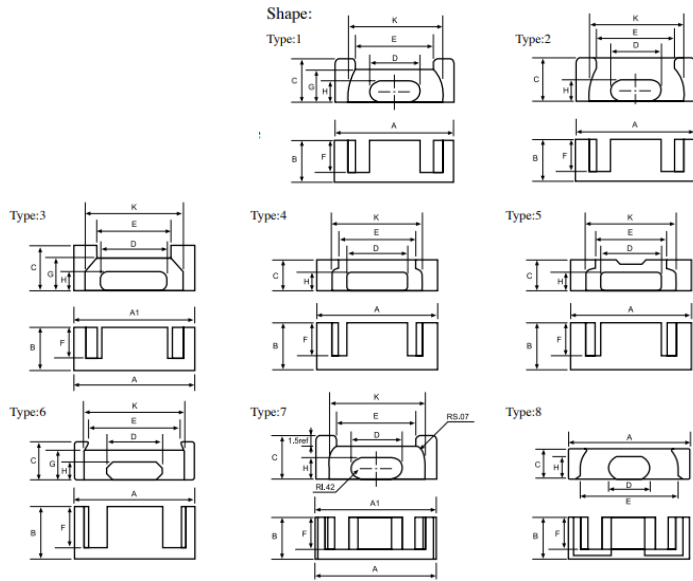

规格 Type	尺寸Dimensions (mm)									图号 Fig.
	A	B	C	D	E	F	G	H	K	
EPC-10.20-3.40-4.05	10.20 ± 0.30	4.05 ± 0.15	3.40 ± 0.15	5.00 ± 0.10	5.30min	2.55min	-	1.90 ± 0.10	7.60min	2
EPC-10.20-3.40-4.05	10.20 ± 0.30	4.05 ± 0.15	3.40 ± 0.15	5.00 ± 0.10	5.70min	2.55min	-	1.90 ± 0.10	7.90min	1
EPC-12.40-3.60-5.75	12.40 + 0.40/- 0.00	5.75 + 0.13/- 0.00	3.60 + 0.00/- 0.25	6.20 + 0.00/- 0.30	7.32+ 0.30/- 0.00	3.25 + 0.20/- 0.00	-	2.30 + 0.00/- 0.18	8.80 + 0.30/- 0.00	2
EPC-13.50-4.60-6.60	13.50 ± 0.25	6.60 ± 0.20	4.60 ± 0.15	5.60 ± 0.15	8.50min	4.50 ± 0.20	-	2.05 ± 0.10	11.00 ± 0.20	1
EPC-13.20-4.60-6.60	13.20 ± 0.25	6.60 ± 0.20	4.60 ± 0.15	5.60 ± 0.15	8.70min	4.50 ± 0.20	-	2.05 ± 0.10	11.00min	1
EPC-13.10-4.40-6.60	13.10 ± 0.20	6.60 ± 0.20	4.40 + 0.10/- 0.15	5.55 ± 0.15	8.30min	4.50 ± 0.20	3.65 ± 0.15	2.15 + 0.10/- 0.15	10.60min	1
EPC-14.50-6.00-7.40	14.50 ± 0.30	7.40 ± 0.20	6.00 ± 0.15	7.00 ± 0.15	10.10 ± 0.25	5.50 ± 0.15	-	3.20 ± 0.10	12.30 ± 0.30	2
EPC-17.60-6.00-8.55	17.60 ± 0.38	8.55 ± 0.20	6.00 ± 0.15	7.70 ± 0.15	11.50min	6.05 ± 0.20	-	2.75 ± 0.10	14.40min	1
EPC-17.60-6.05-8.55	17.60 ± 0.30	8.55 ± 0.20	6.05 ± 0.15	7.60 ± 0.20	12.00min	6.25 ± 0.20	-	2.85 ± 0.15	14.50min	7
EPC-18.40-4.10-13.20	18.40 ± 0.30	13.20 ± 0.15	4.10 ± 0.15	9.10 ± 0.15	10.70min	10.30 ± 0.15	-	2.65 ± 0.10	13.10min	1
EPC-19.10-6.00-10.00	19.10 ± 0.40	10.00 ± 0.20	6.00 ± 0.15	8.50 ± 0.15	13.10min	7.50 + 0.20	-	2.50 ± 0.10	15.80min	1
EPC-19.60-6.00-9.75	19.60 ± 0.50	9.75 ± 0.20	6.00 ± 0.20	8.20 ± 0.20	13.60 ± 0.50	7.25 ± 0.20	-	2.40 ± 0.15	16.40 ± 0.50	1
EPC-19.60-6.00-9.75	19.60 ± 0.50	9.75 ± 0.20	6.00 ± 0.20	8.20 ± 0.20	13.40 ± 0.50	7.25 ± 0.20	-	2.40 ± 0.15	16.40 ± 0.50	1
EPC-19.50-6.00-10.90	19.50 ± 0.40	10.90 ± 0.20	6.00 ± 0.15	8.50 ± 0.15	13.40min	8.40 ± 0.15	4.60 ± 0.15	2.45 ± 0.15	16.20min	3
EPC-19.60-4.12-12.34	19.60 ± 0.40	12.34 ± 0.25	4.12 ± 0.10	10.02 ± 0.15	14.50 ± 0.35	9.25 ± 0.20	-	2.03 ± 0.10	15.75 ± 0.35	4
EPC-20.00-4.12-12.34	20.00 ± 0.40	12.34 ± 0.25	4.12 ± 0.15	10.02 ± 0.15	14.90 ± 0.35	9.25 ± 0.20	-	2.03 ± 0.15	16.15 ± 0.35	4
EPC-21.90-7.30-14.50	21.90 ± 0.30	14.50 ± 0.20	7.30 ± 0.15	9.50 ± 0.15	14.70min	11.55 ± 0.15	-	4.20 ± 0.15	16.40min	5
EPC-24.80-8.90-12.80	24.80 ± 0.40	12.80 ± 0.15	8.90 ± 0.15	8.40 ± 0.20	20.1 ± 0.30	9.60 ± 0.15	-	6.60 ± 0.15	-	8
EPC-25.40-8.00-12.50	25.40 ± 0.50	12.50 ± 0.25	8.00 ± 0.25	10.50 ± 0.25	18.35 ± 0.40	9.00 ± 0.20	6.20ref	4.00 ± 0.20	21.05 ± 0.40	6



规格 Type	磁芯参数					图号 Fig.
	Cl(mm ²)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)	
EPC-10.20-3.40-4.05	2.03	19.28	8.36	161.23	0.92	2
EPC-10.20-3.40-4.05	2.18	18.73	8.61	161.27	0.88	1
EPC-12.40-3.60-5.75	1.56	22.51	14.42	324.59	1.44	2
EPC-13.50-4.60-6.60	2.55	31.08	12.18	378.55	2.12	1
EPC-13.20-4.60-6.60	2.38	29.29	12.33	361.1	2	1
EPC-13.10-4.40-6.60	2.28	28.92	12.68	366.8	1.8	1
EPC-14.50-6.00-7.40	1.97	24.38	12.39	301.97	1.73	2
EPC-17.60-6.00-8.55	1.76	38.87	22.07	857.9	4.72	1
EPC-17.60-6.05-8.55	1.85	40	21.6	864	4.72	7
EPC-18.40-4.10-13.20	2.49	55.11	22.09	1217.4	6.36	1
EPC-19.10-6.00-10.00	2.07	47.12	22.72	1070.6	5.36	1
EPC-19.60-6.00-9.75	1.88	43.3	23	995.9	5.38	1
EPC-19.60-6.00-9.75	2.26	49.38	21.89	1080.9	5.3	1
EPC-19.50-6.00-10.90	1.94	41.99	21.64	908.69	5.9	3
EPC-19.60-4.12-12.34	2.95	52.33	17.7	926.24	5.42	4
EPC-20.00-4.12-12.34	2.89	53.24	18.4	979.62	5.52	4

规格 Type	磁芯参数					图号 Fig.
	Cl(mm ²)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g/set)	
EPC-21.90-7.30-14.50	1.71	63.15	36.9	2330.2	12.84	5
EPC-24.80-8.90-12.80	1.22	60.34	49.24	2970.9	15.5	8
EPC-25.40-8.00-12.50	1.39	58.64	42.31	2481.1	12.16	6